




Cast Aluminum LED Exit Specification


Exit Signs	120 or 277 Voltage, Damp Location
-------------------	-----------------------------------

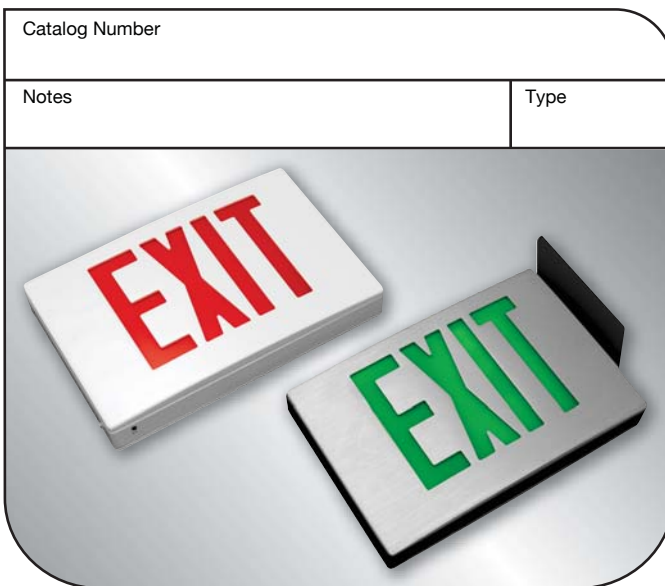

Features and Benefits:


- Universal 120/277 VAC operation
- LED energy savings
- Universal canopy included
- Curved design
- Specification grade
- Universal K/O chevrons
- Damp location rated
- Meets NFPA 101 Life Safety Code and NEC
- UL 924 Listed
- Maintenance free Ni-Cd battery provides an estimated service life of 10 years with an Operating Temperature range of 0° C to 50° C.
- Low voltage battery disconnection, preventing deep discharge damage to the battery
- Brushed aluminum face on black house or white powder coated finish options

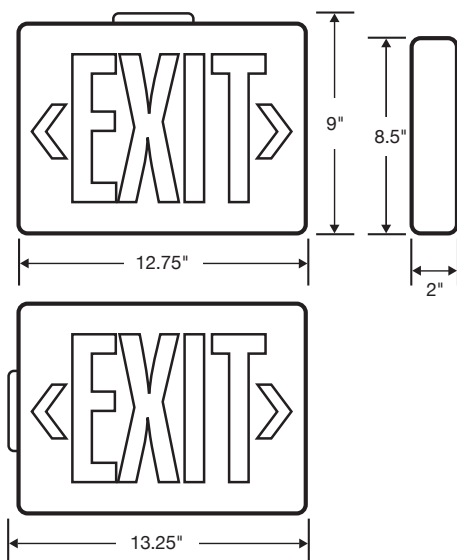

Dimensions:



Premium grade Ni-Cd rechargeable battery

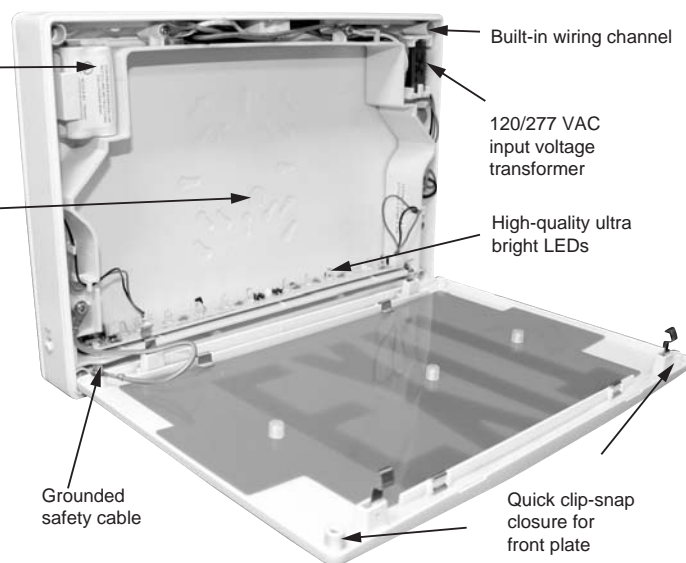Universal wall-mounting KO pattern



Warranties & Compliances:	Item #	Number of Faces	Letter Color	Battery or AC	Item #	Number of Faces	Letter Color	Battery or AC	
	Ni-Cd battery 5 YEAR WARRANTY Electronics 5 YEAR WARRANTY LED Strip 25 YEAR WARRANTY  	Ordering Information:				For white housing and face plate add suffix "W" For self-diagnostic/self test add suffix "SD"			
	26D90	Single Face	Red	AC only	26L90	Single Face	Red	Battery Backup	
	26D91	Single Face	Green	AC only	26L91	Single Face	Green	Battery Backup	
	26D93	Double Face	Red	AC only	26L93	Double Face	Red	Battery Backup	
	26D94	Double Face	Green	AC only	26L94	Double Face	Green	Battery Backup	
	Item #	Description							
	Accessories:								
	207WG	Wire Guard for Exit Sign							
	207WGWH	White Wire Guard for Exit Sign							
	207PS	Polycarbonate Shield for Exit Sign							
	20730	Ni-Cd Battery 4.8V 650mAh							

