



# Elite G40 277V Globe NON DIMMABLE

TCP's high efficiency LED G40 Globe lamps, provides bright smooth lighting for large areas both indoor and outdoor.

## Limitless options for the following applications:

- Ceiling Fixtures
- Garage Lighting
- Lamp Posts

## Great features and benefits:

- Perfect for 277V applications
- Energy Efficient: 80% more efficient than halogen alternatives
- Long life: 25,000 hours
- Replaces 150W incandescents
- Excellent Color consistency and high color rendering (CRI)
- UL approved for damp locations



31W G40 Globe Lamps



we know light.™

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP MAR 2016/57118




**LED** 25,000 Hours average rated life, 277 Volts

**Applications:**


Use anywhere a standard incandescent is used.

**Replaces Incandescent for:**

- + Ceiling Fixtures
- + Garage Lighting
- + Lamp Post



Features	Benefits
Perfect for 277V applications	Instant energy savings
Up to 80% less energy than halogen alternatives	Minimizes replacement and maintenance costs
Long life	Perfect for sensitive display lighting
Very low heat generation	Fits all A-Lamp sockets
Excellent Color Consistency and CRI	Enhances colors of focal point while maintaining uniformity throughout lighting installation from lamp to lamp
UL approved for damp location	Can be used outdoors when protected from elements. Withstands humidity indoors/outdoors
Shatter resistant	Lower the risk of injury and breakage
ANSI construction compliant	

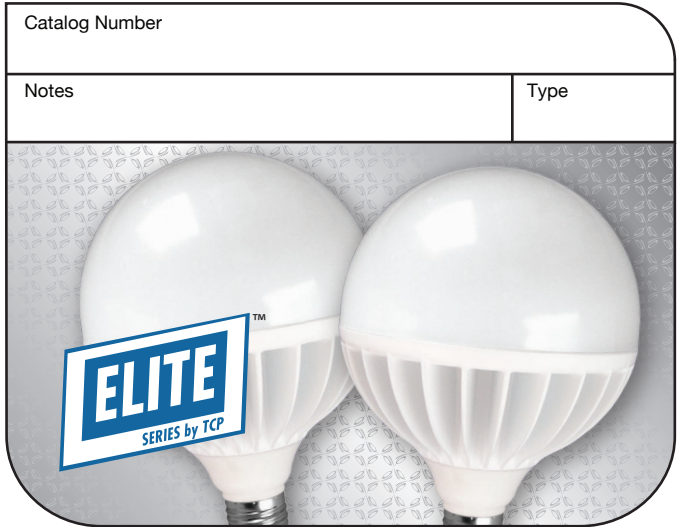

**Specifications**

Input Line Voltage:	277 VAC
Input Power	31W
Input Line Frequency	60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	-30°C
Maximum Operating Temp	40°C
CRI	82

Warranties and Certifications:	Item #	Description	Voltage	Wattage	Wattage Equivalent	M.O.L. (inches)	Diameter (inches)	Lumens	LPW	Beam Angle	CCT	CRI
 <b>5 YEAR WARRANTY</b>	LED31E26G40277V27K	31W G40 Globe - 2700K, Frosted	277	31	150	7	5	2300	74.2	180	2700K	82
	LED31E26G40277V30K	31W G40 Globe - 3000K, Frosted	277	31	150	7	5	2400	77.4	180	3000K	82
	LED31E26G40277V41K	31W G40 Globe - 4100K, Frosted	277	31	150	7	5	2500	80.6	180	4100K	82
	LED31E26G40277V50K	31W G40 Globe - 5000K, Frosted	277	31	150	7	5	2600	83.9	180	5000K	82
For the most up-to-date specs, please visit <a href="http://www.tcpi.com">www.tcpi.com</a>												