

LED Low Profile Thermoplastic Emergency Light Specification

LED Emergency Light 120 or 277 Voltage, Damp Location

Features and Benefits:

Illumination

- Long lasting, efficient ultra-bright white LEDs.
- High-performance chrome-plated metalized reflector and polycarbonate lens for optimal light distribution.
- Adjustable LED lamp heads increases center-to center spacing with 8 LEDs in each lamp head. Optional 12 LEDs per lamp head increases center-to center spacing to 18'.

Electrical

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transformer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting


- Surface mount via quick-connect back plate fits most standard size junction boxes and snaps into place make internal electrical connections.
- Conduit mount knockout on top of housing.
- Suitable for wall or ceiling mount.

Housing


 Injection-molded, engineering-grade, V-O flame retardant, high-impact, thermoplastic in white or black finish.

Warranty/Listing

- Three year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.

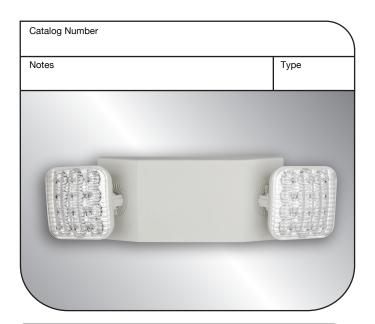

Dimensions:

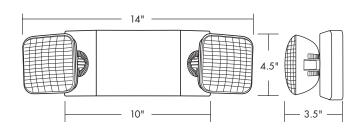

Warranties & Compliances: Item #		Item#	Description	LED Color	Housing Color	TCP Traditional Equivalents	
	Orde	Ordering Information: LED EMERGENCY LIGHTING — WHITE HOUSING					
OSHA		LEDWEL LEDWELRC LEDWELSDT LEDWELRCSDT	White LED Emergency Light White LED Emergency Light Remote Capable White LED Emergency Light, Self Diagnostic Test White LED Emergency Light, White Remote Capable, Self Diagnostic Test	White White White White	White White White White	20760, 20761 20765 20766SD 20765,20766SD	
NFPA NATIONAL FIRE	Accessories	LED REMOTE HEA LEDEL1SDT LEDEL2SDT LEDEL1SDTWL LEDEL2SDTWL	IDS — WHITE HOUSING LED Emergency Lighting Remote Head Single, Self Diagnostic Test LED Emergency Lighting Remote Head Double, Self Diagnostic Test LED Emergency Lighting Single Remote Head Wet Location, Self Diagnostic Test LED Emergency Lighting Double Remote Head Wet Location, Self Diagnostic Test	White White White White	White White White White	207R1 207R2	
Battery Pro-Rated 5 YEAR WARRANTY	•	LED EMERGENCY LEDWELB LEDWELRCB LEDWELSDTB LEDWELRCSDTB	LIGHTING — BLACK HOUSING Black LED Emergency Light Black LED Emergency Light Remote Capable Black LED Emergency Light, Self Diagnostic Test Black LED Emergency Light, White Remote Capable, Self Diagnostic Test	White White White White	Black Black Black Black	20762,20763D	
Electronics/Housing YEAR WARRANTY	Accessories	LED REMOTE HEA LEDEL1SDTB LEDEL2SDTB LEDEL1SDTWLB LEDEL2SDTWLB	IDS — BLACK HOUSING LED Emergency Lighting Remote Head Single, Self Diagnostic Test LED Emergency Lighting Remote Head Double, Self Diagnostic Test LED Emergency Lighting Single Remote Head Wet Location, Self Diagnostic Test LED Emergency Lighting Double Remote Head Wet Location, Self Diagnostic Test	White White White White	Black Black Black Black		



