




TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market — that transforms your surroundings and envelopes you in warmth — lighting that generates beauty with every flip of the switch.

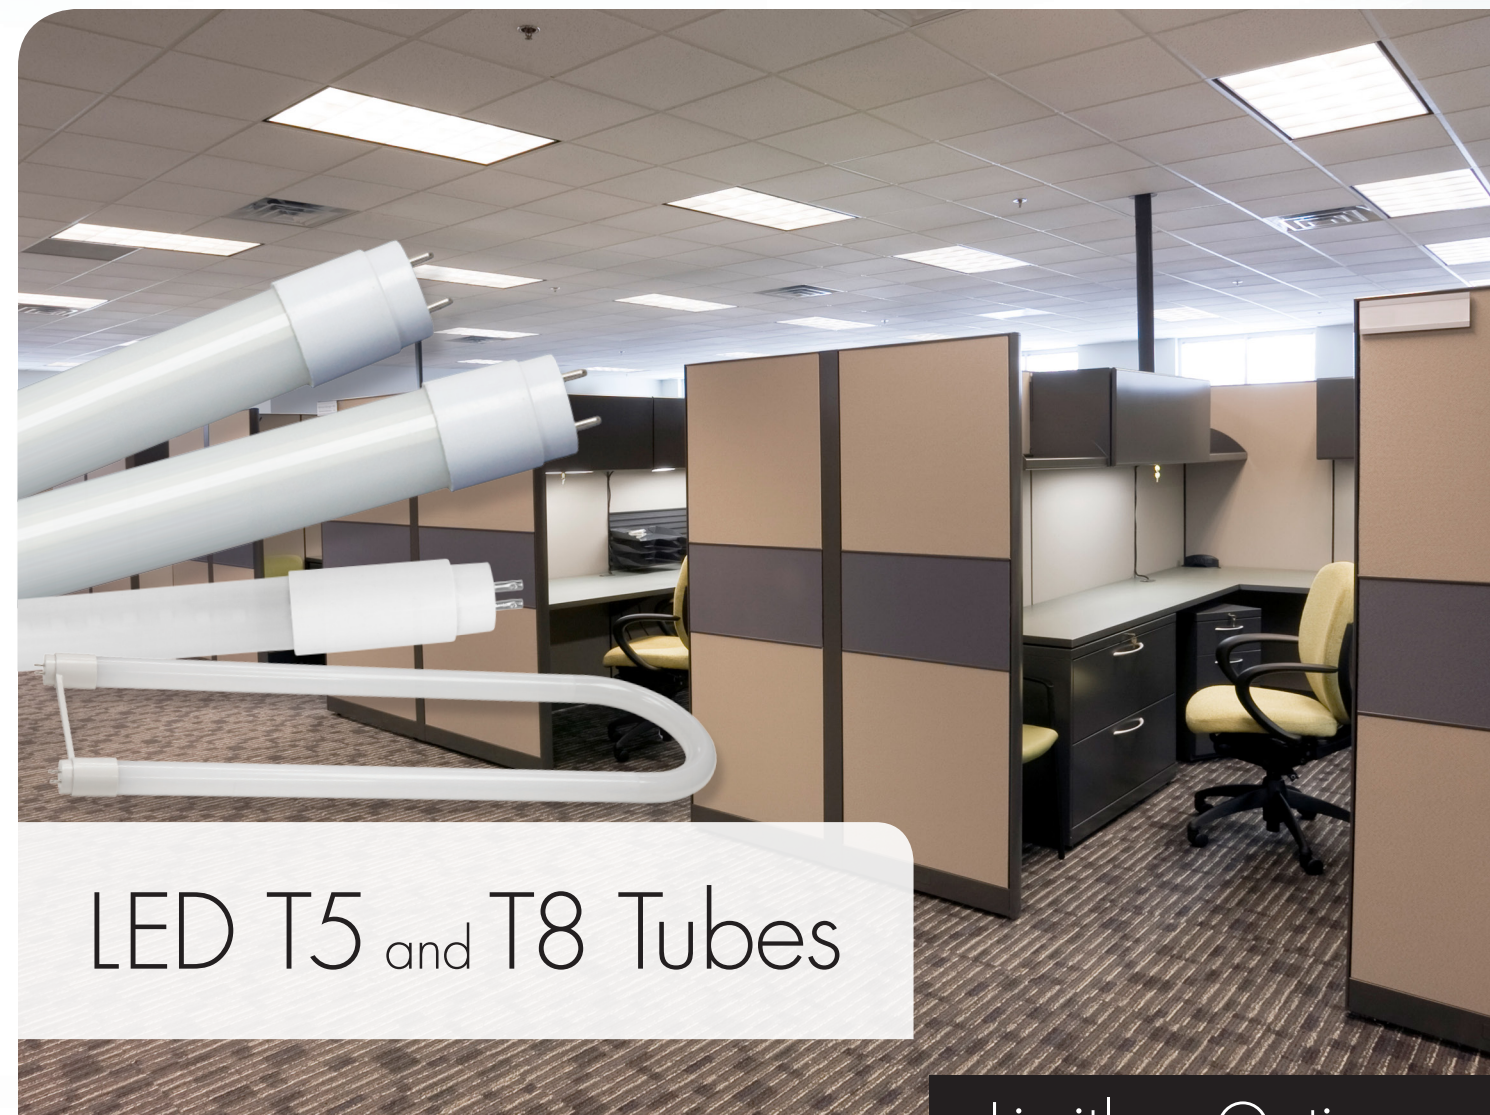

LED T5 and T8 Tubes

Limitless Options for the following applications:

- Offices
- Restaurants
- Retail Stores
- Lobbies
- Schools
- Hospitals



5 YEAR
WARRANTY



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com
325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516



we know light.™

we know light.™



Features and Benefits

>50% energy savings (based on T8 NBF energy use)
Long 50,000 hour rated life — minimizes replacements and labor costs
Compatible with Instant, Rapid or Programmed Start ballasts and most traditional fluorescent ballasts
Dimmable (0-10v dimming ballasts recommended)
No rewiring of fixture — simply replace fluorescent lamp with LED lamp
Instant on/off
No mercury — great for all environments
Rated for enclosed fixtures
2', 3', 4' tubes and U6 tube options available
No UV

Specifications

Item #	Min Starting Temp	Max Operating Temp	Voltage	NSF 2 Rated	Beam Angle	Field Angle*	PF	THD**
L12T8	-30c	55c	120-277, 347V	no	210°	325°	> .99	< 8%
LPT815A	-30c	55c	120-277, 347V	no	200°	305°	> .99	< 8%
LT818A	-30c	55c	120-277, 347V	no	200°	305°	> .99	< 8%
L12T8-95	-30c	55c	120-277, 347V	no	210°	325°	> .99	< 8%
T80414095P	-30c	55c	120-277V	no	200°	305°	> .99	< 8%
L11T8	-30c	55c	120-277, 347V	no	210°	325°	> .99	< 8%
T80430	-30c	55c	120-277V	no	200°	305°	> .99	< 8%
L11T83	-30c	55c	120-277, 347V	no	210°	325°	> .99	< 8%
L9T8	-30c	55c	120-277, 347V	no	210°	325°	> .99	< 8%
L13T8U	-30c	55c	120-277, 347V	no	160°	325°	> .99	< 8%
L15T8-SC	-30c	45c	120-277, 347V	yes	160°	290°	> .99	< 8%
L25T5	-20C	45c	120-277, 347V	yes	160°	270°	> .99	< 5%
L13T5	-20C	45c	120-277, 347V	yes	160°	250°	> .99	< 5%

NOTE: Use shunted sockets for Instant Start ballasts. Use unshunted sockets for Rapid, Programmed, and Dimmable ballasts.



*Calculated **At 120v, ballast dependent

Listing

UL/cUL Listed – damp location rated
Approved for open and enclosed fixtures

Warranty

Five years against defects in manufacturing

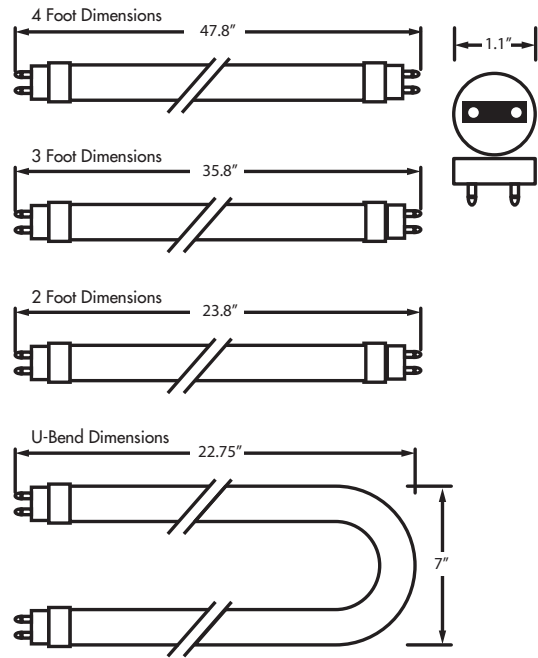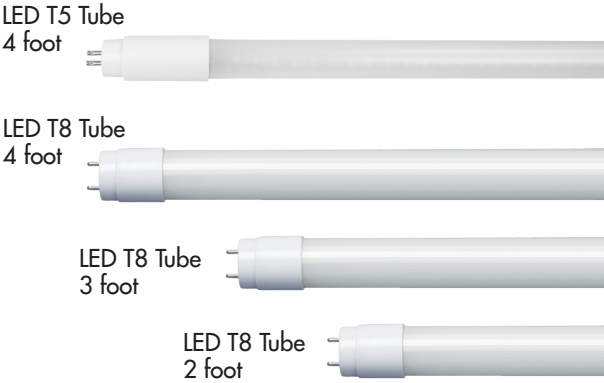

To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.



5 YEAR WARRANTY



LED DirecT8™ Instant Start

Item#	Description	DLC QPL*	Lamp Watts	Equiv Watts	LBF System Watts	NBF System Watts	HBF System Watts	LBF Lumens	NBF Lumens	HBF Lumens	CCT	CRI	Base
LED 12 WATT T8 TUBE – 4 FOOT GLASS (DLC SEARCH "L12T8D50**")													
L12T8D5030K	LED 12W 4' T8 IS/RS 30K	★	12W	32W	13.0	14.9	21.5	1260	1700	2280	3000K	80	G13
L12T8D5035K	LED 12W 4' T8 IS/RS 35K	★	12W	32W	13.0	14.9	21.5	1300	1750	2340	3500K	80	G13
L12T8D5041K	LED 12W 4' T8 IS/RS 41K	★	12W	32W	13.0	14.9	21.5	1340	1800	2400	4100K	80	G13
L12T8D5050K	LED 12W 4' T8 IS/RS 50K	★	12W	32W	13.0	14.9	21.5	1380	1850	2480	5000K	80	G13
L12T8D5041KBP	LED 12W 4' T8 IS/RS 41K BULK PACK	★	12W	32W	13.0	14.9	21.5	1340	1800	2400	4100K	80	G13
L12T8D5050KBP	LED 12W 4' T8 IS/RS 50K BULK PACK	★	12W	32W	13.0	14.9	21.5	1380	1850	2480	5000K	80	G13
LED 15 WATT T8 TUBE – 4 FOOT GLASS MODEL# T80433 (DLC SEARCH "T80433**")													
LT818A30K	LED 15W 4' T8 IS/RS 30K	★	15W	32W	15.4	17.5	25.7	2000	2300	3380	3000K	80	G13
LT818A35K	LED 15W 4' T8 IS/RS 35K	★	15W	32W	15.4	17.5	25.7	2050	2350	3450	3500K	80	G13
LT818A41K	LED 15W 4' T8 IS/RS 41K	★	15W	32W	15.4	17.5	25.7	2050	2350	3450	4100K	80	G13
LT818A50K	LED 15W 4' T8 IS/RS 50K	★	15W	32W	15.4	17.5	25.7	2100	2400	3525	5000K	80	G13
LED 12 WATT HIGH CRI T8 TUBE – 4 FOOT GLASS MODEL# T8021													
L12T8D5027K95	LED 12W 4' T8 IS/RS 27K 95		12W	32W	13.0	14.9	21.5	1300	1750	2340	2700K	90	G13
L12T8D5030K95	LED 12W 4' T8 IS/RS 30K 95		12W	32W	13.0	14.9	21.5	1340	1800	2400	3000K	90	G13
L12T8D5035K95	LED 12W 4' T8 IS/RS 35K 95		12W	32W	13.0	14.9	21.5	1340	1800	2400	3500K	90	G13
L12T8D5041K95	LED 12W 4' T8 IS/RS 41K 95		12W	32W	13.0	14.9	21.5	1360	1825	2425	4100K	90	G13
L12T8D5050K95	LED 12W 4' T8 IS/RS 50K 95		12W	32W	13.0	14.9	21.5	1380	1850	2480	5000K	90	G13
T80414095P	LED 12W 4' T8 IS/RS 41K 95		12W	32W	12.5	15.0	21.5	1050	1400	1860	4100K	90	G13
LED 11 WATT HIGH EFFICACY T8 TUBE – 4 FOOT GLASS MODEL# T8024													
L11T8D5030K	LED 11W 4' T8 HE IS/RS 30K		11W	32W	11.3	13.6	18.5	1340	1800	2410	3000K	80	G13
L11T8D5035K	LED 11W 4' T8 HE IS/RS 35K	★	11W	32W	11.3	13.6	18.5	1380	1850	2480	3500K	80	G13
L11T8D5041K	LED 11W 4' T8 HE IS/RS 41K	★	11W	32W	11.3	13.6	18.5	1410	1900	2540	4100K	80	G13
L11T8D5050K	LED 11W 4' T8 HE IS/RS 50K	★	11W	32W	11.3	13.6	18.5	1450	1950	2610	5000K	80	G13
LED 10 WATT HIGH EFFICACY T8 TUBE – 4 FOOT GLASS BULK PACK MODEL# T80430 (DLC SEARCH "T80430**")													
T8043040EBP	LED 10W 4' T8 HE IS/RS 41K BULK PACK	★	10W	32W	11.6	12.5	19.4	1625	1850	2700	4100K	80	G13
T8043050EBP	LED 10W 4' T8 HE IS/RS 50K BULK PACK	★	10W	32W	11.6	12.5	19.4	1625	1850	2700	5000K	80	G13
LED 11 WATT T8 TUBE – 3 FOOT GLASS MODEL# T8022													
L11T83D5030K	LED 11W 3' T8 IS/RS 30K		11W	25W	11.6	13.5	19.2	1040	1400	1870	3000K	80	G13
L11T83D5035K	LED 11W 3' T8 IS/RS 35K		11W	25W	11.6	13.5	19.2	1080	1450	1940	3500K	80	G13
L11T83D5041K	LED 11W 3' T8 IS/RS 41K		11W	25W	11.6	13.5	19.2	1110	1500	2000	4100K	80	G13
L11T83D5050K	LED 11W 3' T8 IS/RS 50K		11W	25W	11.6	13.5	19.2	1150	1550	2070	5000K	80	G13
LED 9 WATT T8 TUBE – 2 FOOT GLASS MODEL# T8023													
L9T8D5030K	LED 9W 2' T8 IS/RS 30K		9W	17W	8.5	9.5	14.2	850	1150	1540	3000K	80	G13
L9T8D5035K	LED 9W 2' T8 IS/RS 35K	★	9W	17W	8.5	9.5	14.2	870	1175	1575	3500K	80	G13
L9T8D5041K	LED 9W 2' T8 IS/RS 41K	★	9W	17W	8.5	9.5	14.2	890	1200	1600	4100K	80	G13
L9T8D5050K	LED 9W 2' T8 IS/RS 50K	★	9W	17W	8.5	9.5	14.2	910	1225	1640	5000K	80	G13

* DLC qualified product at time of printing, consult designlights.org for the most up-to-date listing.

For the most up-to-date specs and warranty information, please visit www.tcp.com



LED T8 Tubes

LED DirecT8™ SHATTERPROOF Instant Start Ballast Only

Item#	Description	DLC QPL*	Lamp Watts	Equiv Watts	LBF System Watts	NBF System Watts	HBF System Watts	LBF Lumens	NBF Lumens	HBF Lumens	CCT	CRI	Base
LED 15 WATT T8 TUBE – 4 FOOT PLASTIC (DLC SEARCH "LPT815A**")													
LPT815A41KBP	LED 15W 4' T8 IS/RS SC 41K BULK PACK	★	15W	32W	15	18	21.5	1650	2100	2450	4100K	80	G13

LED DirecT8™ Instant Start/Rapid Start/Programmed Start Compatible

Item#	Description	DLC QPL*	Lamp Watts	Equiv Watts	LBF System Watts	NBF System Watts	HBF System Watts	LBF Lumens	NBF Lumens	HBF Lumens	CCT	CRI	Base
LED 13 WATT U-BEND T8 TUBE – 6 INCH PLASTIC													
L13T8UD5030K	LED 13W U6 T8 IS/RS 30K	★	13W	32W	13.0	16.0	22.0	1400	1800	2500	3000K	83	2G13
L13T8UD5035K	LED 13W U6 T8 IS/RS 35K	★	13W	32W	13.0	16.0	22.0	1400	1800	2500	3500K	83	2G13
L13T8UD5041K	LED 13W U6 T8 IS/RS 41K	★	13W	32W	13.0	16.0	22.0	1450	1850	2550	4100K	83	2G13
L13T8UD5050K	LED 13W U6 T8 IS/RS 50K	★	13W	32W	13.0	16.0	22.0	1500	1900	2600	5000K	83	2G13

LED DirecT8™ SHATTERPROOF Instant Start/Rapid Start/Dimmable Electronic Compatible

Item#	Description	DLC QPL*	Lamp Watts	Equiv Watts	LBF System Watts	NBF System Watts	HBF System Watts	LBF Lumens	NBF Lumens	HBF Lumens	CCT	CRI	Base
LED 15 WATT T8 TUBE – 4 FOOT SHATTERPROOF GLASS													
L15T8D5030KSC	LED 15W 4' T8 IS/RS SC 30K	★	15W	32W	14.5	18	21.5	1600	2000	2350	3000K	80	G13
L15T8D5035KSC	LED 15W 4' T8 IS/RS SC 35K	★	15W	32W	14.5	18	21.5	1600	2000	2350	3500K	80	G13
L15T8D5041KSC	LED 15W 4' T8 IS/RS SC 41K	★	15W	32W	14.5	18	21.5	1650	2100	2450	4100K	80	G13
L15T8D5050KSC	LED 15W 4' T8 IS/RS SC 50K	★	15W	32W	14.5	18	21.5	1700	2200	2500	5000K	80	G13

LED T5 Tubes

LED DirecT5™ SHATTERPROOF Electronic Ballast Compatible

Item#	Description	DLC QPL*	Lamp Watts	Equiv Watts	System Watts	System Lumens	CCT	CRI	Base
LED 25.5 WATT T5 TUBE – 4 FOOT SHATTERPROOF GLASS MODEL# T8033									
L25T5D5030K	LED 25W 4' T5 IS/RS SC 30K	★	25.5W	54W	28	3150	3000K	80	G5
L25T5D5035K	LED 25W 4' T5 IS/RS SC 35K	★	25.5W	54W	28	3150	3500K	80	G5
L25T5D5041K	LED 25W 4' T5 IS/RS SC 41K	★	25.5W	54W	28	3190	4100K	80	G5
L25T5D5050K	LED 25W 4' T5 IS/RS SC 50K	★	25.5W	54W	28	3280	5000K	80	G5
LED 13 WATT T5 TUBE – 4 FOOT SHATTERPROOF GLASS MODEL# T8034									
L13T5D5030K	LED 13W 4' T5 IS/RS SC 30K	★	13W	28W	16	1800	3000K	80	G5
L13T5D5035K	LED 13W 4' T5 IS/RS SC 35K	★	13W	28W	16	1800	3500K	80	G5
L13T5D5041K	LED 13W 4' T5 IS/RS SC 41K	★	13W	28W	16	1850	4100K	80	G5
L13T5D5050K	LED 13W 4' T5 IS/RS SC 50K	★	13W	28W	16	1900	5000K	80	G5

* DLC qualified product at time of printing, consult designlights.org for the most up-to-date listing.

For the most up-to-date specs and warranty information, please visit www.tcpi.com



LED T8 Ballast Compatibility Guides

Instant Start Ballasts Compatible with LED DirecT8™

Manufacturer	Model #	Voltage
ESPEN	VE2P32MVHIPE	UNV
	VE4P32MVHIPE	UNV
GE	GE132MAX-L/ULTRA	UNV
	GE132MAX-P-N/ULTRA	UNV
	GE232MAX347-N	347
	GE232MAX-N/ULTRA	UNV
	GE232MAX-G-N	UNV
	GE232MAX-P-N/ULTRA	UNV
	GE232MAX-H/ULTRA	UNV
	GE232MAX-P-H/ULTRA	UNV
	GE232MAX-P-L/ULTRA	UNV
	GE332MAX-L/ULTRA	UNV
	GE332MAX-N/ULTRA	UNV
	GE332MAX-P-N/ULTRA	UNV
	GE332MAX-G-N	UNV
	GE332MAX-H/ULTRA	UNV
	GE432MAX-P-L/ULTRA	UNV
	GE432MAX-G-N	UNV
	GE432MAX-N/ULTRA	UNV
	GE432MAX-H/ULTRA	UNV
	GE432MAX-P-H/ULTRA	UNV
Osram/Sylvania	QHE2X32T8/UNV ISN-SC	UNV
	QHE2X32T8/UNV ISL-SC	UNV
	QHE2X32T8/UNV ISH-SC	UNV
	QHE2X32T8/347 ISN-SC	347
	QHE4X32T8/UNV ISN-SC	UNV
	QHE4X32T8/UNV ISL-SC	UNV
	QHE4X32T8/UNV ISH-SC	UNV
	QHE4X32T8/UNV ISH	UNV
	QTP2X32T8/UNV ISN-SC	UNV
	QTP3X32T8/UNV ISN-SC	UNV
	QTP2X32T8/UNV ISL-SC	UNV
	QTP3X32T8/UNV ISL-SC	UNV
	QTP2X32T8/UNV ISH-SC	UNV
	QTP3X32T8/UNV ISH-SC	UNV
	QTP4X32T8/UNV ISN SC	UNV
Philips/Advance	IOPA-2P32-LW-N	UNV
	IOPA-3P32-LW-N	UNV
	IOPA-4P32-LW-N	UNV
	IOPA-4P32-N	UNV
	IOPA-2P32-HL-N	UNV
	IOPA-3P32-HL-N	UNV

Emergency Ballasts Compatible with LED DirecT8™

Manufacturer	Model #	Voltage
IOTA	I-320	I-320
Bodine	B30	B30
	B50	B50

Manufacturer	Model #	Voltage
Philips/Advance (cont.)	IOPA-2P32-LW-SC	UNV
	IOPA-4P32-LW-SC	UNV
	IOP-2P32-LW-N	UNV
	IOP-3P32-LW-N	UNV
	IOP-4P32-LW-N	UNV
	IOP-3P32-N	UNV
	ICN-2P32-N	UNV
	ICN-3P32-N	UNV
	ICN-2P32-SC	UNV
	ICN-4P32-N	UNV
	GOPA-2P32-SC	347
	GOPA-4P32-SC	347
	REL-2P32-SC	UNV
	REL-2P32-RH-TP	UNV
	VEL-2P32-SC	UNV
	VEL-4P32-SC	UNV
	IOP-3P32HL-90L-SC	UNV
	VOP-2P32-LW	277
	GEL-2P32-SC	347
	GEL-3P32-SC	347
Standard	E432T8IS120/N/AS	UNV
	E232T8IS120/N/AS	UNV
	E432PI347G0/347	347
	E232T8IS347/H/90C	347
	E432T8IS347/H/90C	347
TCP	E2P32ISUNVE	UNV
	E2P32ISUNVHE	UNV
	E2P32ISUNVLE	UNV
	E3P32ISUNVE	UNV
	E3P32ISUNVHE	UNV
	E3P32ISUNVLE	UNV
	E4P32ISUNVE	UNV
	E4P32ISUNVHE	UNV
	E4P32ISUNVLE	UNV
	E2P32IS120RES	UNV
Universal	B132IUNVHP-N	UNV
	B232IUNVHP-N	UNV
	B232IUNVEL-A rev D	UNV
	B232I277RHA	277
	B332IUNVHP-A	UNV
	B432I277RHA	277
	B432I120RHA	UNV
	B232I120RHA*	UNV
	B432I1UNVHP-A	UNV
	B23IUNVHP-N010C	UNV

Instant Start Ballasts Not Recommended for use with LED DirecT8 include:
Philips/Advance: IOP-3P32-LW-SC, IOP-2P32-LW-SC *Requires 5 minutes of warm up time
TCP® | 325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com



LED T8 Ballast Compatibility Guides

Electronic Ballasts Compatible with LED Direct8™ for LI5T8D50XXKSC and LI3T8UD50XXK Series

Instant Start Ballasts

Brand	Model #	Four Lamp 120V 277V		Three Lamp 120V 277V		Two Lamp 120V 277V		One Lamp 120V 277V	
Advance	ICN-1P32-N	-	-	-	-	-	-	Y	Y
	ICN-2P32-N	-	-	-	-	Y	Y	N	N
	ICN-3P32-N	-	-	Y	Y	Y	Y	-	-
	ICN-4P32-N	Y	Y	Y	Y	-	-	-	-
	ICN-2P32-SC	-	-	-	-	Y	Y	Y	Y
	ICN-4P32-SC	N	Y	N	Y	-	-	-	-
	IOPA-1P32-N	-	-	-	-	Y	Y	N	N
	IOPA-4P32-N	Y	Y	Y	Y	-	-	-	-
	IOPA-1P32-LW-N	-	-	-	-	-	-	N	N
	IOPA-2P32-LW-N	-	-	-	-	Y	Y	N	N
	IOPA-4P32-LW-N	Y	Y	Y	Y	-	-	-	-
	REL-2P32-SC	-	-	-	-	Y	-	Y	-
Espen	REL-4P32-RH-TP	N	-	N	-	-	-	-	-
	VE232MVH-IP	-	-	-	-	Y	Y	Y	Y
	VE232MVH-IP-E	-	-	-	-	Y	Y	Y	Y
	VE232MVH-IP-HE	-	-	-	-	Y	Y	N	N
	VE432MVH-IP	Y	Y	Y	Y	-	-	-	-
Fulham	VE432MVH-IP-E	Y	Y	Y	Y	-	-	-	-
	VE432MVH-IP-HE	Y	Y	Y	Y	-	-	-	-
	NPY-120-432-T8-B	Y	-	Y	-	-	-	-	-
	NPY-120-432-T8-S	Y	-	Y	-	-	-	-	-
	WHCG3-120-T8-S	-	-	Y	-	Y	-	-	-
Fusion	WH2-120-L	-	-	-	-	-	-	Y	-
	WH5-120-L	Y	-	N	-	-	-	-	-
	FB232MVE	-	-	-	-	Y	Y	Y	Y
	FB232MVE-HE	-	-	-	-	Y	Y	Y	Y
	FB232MVE-LHE	-	-	-	-	Y	-	Y	-
GE	FB332MVE	-	-	Y	Y	Y	Y	-	-
	FB432MVE	N	N	N	N	-	-	-	-
	FB432MVE-HE	N	N	N	N	-	-	-	-
	GE132MAXPN/ULTRA	-	-	-	-	-	-	Y	Y
	GE 232-120RES-DIY-B	-	-	-	-	Y	-	Y	-
	GE232MAX-GN	-	-	-	-	Y	Y	Y	Y
	GE232MAXPL/ULTRA	-	-	-	-	Y	Y	Y	Y
	GE232MAXPN/ULTRA	-	-	-	-	Y	Y	Y	Y
	GE232MAXPH/ULTRA	-	-	-	-	Y	Y	N	N
	GE232-MV-N	-	-	-	-	Y	Y	Y	Y
Howard	GE332MAX-L/ULTRA	-	-	Y	Y	Y	Y	-	-
	GE332MAX90-V60	-	-	Y	Y	N	N	-	-
	GE332MV-N-DIY	-	-	Y	Y	Y	Y	-	-
	GE432MAX-GN	Y	Y	Y	Y	-	-	-	-
Keystone	GE432MAX-H/ULTRA	Y	Y	Y	Y	-	-	-	-
	GE432MAX-H-42T	Y	Y	Y	Y	-	-	-	-
	EP3/32IS/MV/SC/HE	-	-	Y	Y	Y	Y	-	-
	EP4/32IS/MV/MC/HE	Y	Y	Y	Y	-	-	-	-

Instant Start Ballasts

Brand	Model #	Four Lamp 120V 277V		Three Lamp 120V 277V		Two Lamp 120V 277V		One Lamp 120V 277V	
Osram	GHE 2x32T8/UNV ISL SC	-	-	-	-	Y	Y	Y	Y
	GTP 2x32T8/UNV ISN-SC	-	-	-	-	Y	Y	Y	Y
	GHE 4x32T8/UNV ISL SC	Y	Y	Y	Y	-	-	-	-
	GTP 4x32T8/UNV ISN-SC	Y	Y	Y	Y	-	-	-	-
Standard	E232P1120L	-	-	-	-	Y	-	Y	-
	E232T8IS120/L/AS	-	-	-	-	Y	-	Y	-
	E232T8IS120/N/AS	-	-	-	-	Y	-	Y	-
	E432T8IS120/H	Y	-	N	-	-	-	-	-
	E432T8IS120/L/AS/BULK	Y	-	Y	-	-	-	-	-
Universal	E432T8IS120/N/AS/BULK	Y	-	Y	-	-	-	-	-
	B232IUNVH-IP-N	-	-	-	-	Y	Y	-	-
	B332IUNVH-IP-A	-	-	Y	Y	Y	Y	-	-
	B432IUNVH-IP-A	Y	Y	Y	Y	-	-	-	-

Rapid Start Ballasts

Brand	Model #	Four Lamp 120V 277V		Three Lamp 120V 277V		Two Lamp 120V 277V		One Lamp 120V 277V	
Advance	ICN-2540-N	-	-	-	-	Y	Y	Y	Y
	RELB-2540-N	-	-	-	-	Y	-	N	-
Fulham	WHCG5-120T12-RS	-	-	-	-	Y	-	Y	-

Programmed Start Ballasts

Brand	Model #	Four Lamp 120V 277V		Three Lamp 120V 277V		Two Lamp 120V 277V		One Lamp 120V 277V	
Advance	IOA4PSP32-SC	Y	Y	Y	Y	-	-	-	-
	RCN-2S32-SC	-	-	-	-	Y	-	-	-
Fulham	NPY-120-232-LT8	-	-	-	-	Y	-	Y	-
Fusion	FB232MVE-PPS-HE	-	-	-	-	Y	Y	Y	Y
	FB432MVE-PPS-HE	Y	Y	Y	Y	-	-	-	-
GE	GE 232-120-PS-N	-	-	-	-	Y	-	Y	-
	GE232-MVPS-L	-	-	-	-	Y	Y	Y	Y
	GE232-MVPS-N	-	-	-	-	Y	Y	Y	Y
Osram	GE232-MVPS-H	-	-	-	-	Y	Y	N	N
	GTP 3x32T8/UNV PSX-SC	-	-	N	N	-	-	-	-
Robertson	QHE 4x32T8/UNV PSN-SC	Y	Y	Y	Y	-	-	-	-
	RSW240T12120	-	-	-	-	N	-	N	-
Standard	E232T8PS120-277/N/AS/BULK	-	-	-	-	Y	Y	-	-
TCP	E4P32PSUNVE	Y	Y	Y	Y	-	-	-	-
Universal	B232PUNVH-E-B	-	-	-	-	Y	Y	N	N

Dimming Ballasts

Brand	Model #	Four Lamp 120V 277V		Three Lamp 120V 277V		Two Lamp 120V 277V		One Lamp 120V 277V	
Advance	REZ-2S32-SC	-	-	-	-	Y	-	-	-
GE	GE332MAX90-V60	-	-	Y	Y	N	N	-	-
Keystone	KTEB-232-UVPS-VDIM	-	-	-	-	Y	Y	-	-
Osram	QHE 2x32T8/UNV DIM-TC	-	-	-	-	Y	Y	-	-
Universal	B232PUSV3PLA	-	-	-	-	Y	Y	Y	Y
	B232SR120S30	-	-	-	-	N	-	-	-

LED T8 Ballast Compatibility Guides

Electronic Ballasts Compatible with LED Direct8™ Electronic Ballasts Compatible with LED Direct8™ for LI5T8D50XXKSC and LI3T8UD50XXK Series

Brand	Model #	Start Method	Four Lamp		Three Lamp		Two Lamp		One Lamp	
			347V	480V	347V	480V	347V	480V	347V	480V
Arcata	ACT2P32IS347	IS	-	-	-	-	Y	Y	Y	Y
	ACT4P32IS347	IS	Y	Y	Y	Y	-	-	-	-
Advance	GOPA-2P32-LW-N	IS	-	-	-	-	N	-	Y	-
	GOPA-2P32-LW-SC	IS	-	-	-	-	Y	-	Y	-
	GOPA-4P32-LW-SC	IS	Y	-	Y	-	-	-	-	-
	GOPA-2P32-SC	IS	-	-	-	-	Y	-	Y	-
	GOPA-4P32-SC	IS	Y	-	Y	-	-	-	-	-
Fusion	FB232347E-HE	IS	-	-	-	-	Y	-	Y	-
	FB232347E-L	IS	-	-	-	-	Y	-	Y	-
	FB232347E-PPS-HE	PS	-	-	-	-	Y	-	Y	-
	FB432347E-HE	IS	Y	-	Y	-	-	-	-	-
	FB432347E-L	IS	Y	-	Y	-	-	-	-	-
GE	FB432347E-PPS-HE	PS	Y	-	Y	-	-	-	-	-
	GE232MAX347-H	IS	-	-	-	-	Y	-	N	-
	GE332MAX347-H	IS	-	-	Y	-	N	-	-	-
GE	GE432MAX347-H	IS	N	-	N	-	-	-	-	-
Magnetek	B232I347HP	IS	-	-	-	-	N	-	N	-
Osram	QHE 2x32 T8/347 ISL-SC	IS	-	-	-	-	Y	-	Y	-
	QHE 2x32 T8/347 ISN-SC	IS	-	-	-	-	Y	-	Y	-
	QHE 4x32 T8/347 ISL-SC	IS	Y	-	Y	-	-	-	-	-
Standard	E232T8IS347/H/90C	IS	-	-	-	-	N	-	N	-
	E232T8IS347/L/BULK	IS	-	-	-	-	Y	-	Y	-
	E232T8IS347/N/BULK	IS	-	-	-	-	Y	-	Y	-
	E432P1347G01	IS	Y	-	N	-	-	-	-	-
	E432T8IS347/L/BULK	IS	Y	-	Y	-	-	-	-	-
	E432T8IS347/N	IS	Y	-	Y	-	-	-	-	-
	E432T8IS347/N/BULK	IS	N	-	N	-	-	-	-	-
Universal	E432T8IS347/H/90C	IS	N	-	N	-	-	-	-	-
	B232I347HE-A	IS	-	-	-	-	Y	-	Y	-
	B432I347HE-A	IS	Y	-	Y	-	-	-	-	-
	B432I347RH	IS	Y	-	Y	-	-	-	-	-

LED T5 Ballast Compatibility Guides

Electronic Ballasts Compatible with 25.5 watt LED Direct5™

BALLAST for FOUR LAMPS							
Brand	Model #	Four Lamp	Three Lamp	Two Lamp	One Lamp		
ESPEN	VE454MVI-RP	Y	Y	Y	N		
KEYSTONE	KTEB-454HO-UV-PS	Y	Y	N	N		
Osram/Sylvania	QHE 4x54T5HO/UNV PSN HT SCL	Y	Y	Y	Y		
	GTP 4x54T5HO/UNV PSN HT W	Y	N	Y	N		
	QHE 4x54T5HO/347-480 PSN HT SCL	N	N	Y	Y		
Philips/Advance	ICN-4S54-90C-2LS-G	Y	Y	N	N		
	HCN-4S54-90C-2LS-G	Y	Y	N	N		
	HCN-4S54-90C-2LS-G	Y	Y	Y	Y		
	HCN-4S54-90C-2LS-G-347V	Y	Y	Y	Y		
ROBERTSON	PSB454T5MV	Y	Y	Y	Y		
STANDARD	E454T5HOPS347/N/XTRM	Y	Y	Y	Y		
ULTRASAVE	ER254347HTW	N	Y	Y	Y		
	ER454347HTW	Y	Y	Y	N		
UNIVERSAL	B454PUNVH-BE	Y	Y	N	N		

LED T5 Ballast Compatibility Guides

Electronic Ballasts Compatible with 25.5 watt LED Direct5™

BALLAST for TWO LAMPS			
Brand	Model #	Two Lamp	One Lamp
FULHAM	RHA-UNV-254IT5	Y	Y
KEYSTONE	KTEB-254HO-UV-PS-SL	Y	Y
	KTEB-254HO-UV-PS/A	Y	Y
Osram/Sylvania	QHE2x54T5HO/UNV PSN	Y	Y
	GTP2x54T5HO/UNV PSN HT	Y	Y
	GTP 2x54 T5HO/UNV PSN	Y	Y
	QHE 4*54T5HO/347-480 PSN HT SCL	Y	Y
Philips/Advance	ICN-2S54-N	Y	Y
	ICN-2S54-T	Y	Y
	HCN-2S54-90C-WL	Y	Y
	HCN-2S54-90C-WL-347V	Y	Y
	ICN-2S54	Y	Y
	IZT2S54-D	Y	Y
	ICN-2S54-90C-N	Y	Y
TCP	HCN-4S54-90C-2LS-G-347V	Y	Y
	E2PS4PRSUNVE	Y	Y
ULTRASAVE	ER254347H-W	Y	Y
UNIVERSAL	B254PUNV-D	Y	Y

Electronic Ballasts Compatible with 13 watt LED Direct5™

BALLAST for TWO LAMPS			
Brand	Model #	Two Lamp	One Lamp
GE	GE 228 MVPSHA	Y	Y
KEYSTONE	KTEB-221PS-1-TP/A	Y	Y
	KTEB-228HE-UV	Y	Y
Osram / Sylvania	QHE 2x25T5/UNIV PSN	Y	Y
	QHT 2x28T5/UNIV PSN	Y	Y
Philips/Advance	ICN-2828-N	Y	Y
	ICN-2528-N	Y	Y
	ICN-2528-T	Y	Y
	ISN-2528-N	Y	Y
Racehorse	RHA-UNIV-228-L T5	Y	Y
Robertson	PROFESSIONALGTP52x54	Y	Y
Universal	B228PU95S50D	Y	Y
	B228PUNVC	Y	Y
	B228PUNVN	Y	Y
	D228PUNVC	Y	Y