



DT Series Luminaires with RGB and Tunable White

Product Specifications



TCP's DT Series Luminaires feature back-lit technology with a robust construction that still offers a slim, low-profile with beautiful full panel diffusion and superior uniformity.

These color selectable troffers offer 12 different colors and color temperatures ranging from 3500K – 5000K, all at the touch of a remote control. They are the perfect product for adding a fun element to a room. It is also well suited for venues that need a professional atmosphere for formal events such as weddings but want to also provide colored lighting options for birthdays and similar events.

Applications: T-bar Grid Ceilings

Reasons to choose the LED DT Series Luminaires from TCP


- 12 different colors to choose from
- Remote control included
- Color temperature ranges from 3500K-5000K
- Mercury free construction is great for all environments
- Fits standard 1" and 9/16" T-bar grid ceilings
- Utilizes back-lit technology for full diffusion with excellent uniformity
- Slim, low-profile design and lightweight for easy handling

Ideal Applications

- Office
- Retail Stores
- Schools
- Hospitality
- Restaurants
- Entertainment Venues

Specifications

Input Line Voltage	120-277 VAC
Input Line Frequency (Hz)	50/60HZ
Wattage (W)	
2x2	XXW
2x4	XXW
Lumens per Watt (LPW)	>110 LPW
Rated Life	50,000 hours
Minimum Starting Temperature	-20°C
Maximum Operating Temperature	40°C
Power Factor	>90%
THD	<20%
Ratings	UL/CUL
Controls	App/Remote Control

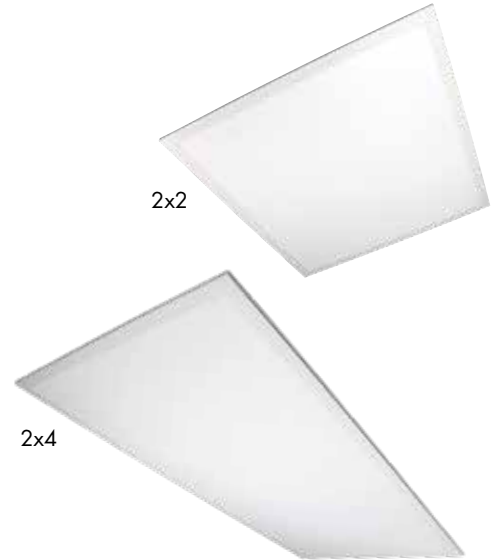

Panel Capabilities

Remote Control



The panels can be tuned to change the lighting in any environment to set the mood for any occasion.

DT	F	4	U	
FAMILY	LENS TYPE	SIZE	VOLTAGE	COLOR TEMPERATURE
DT = Direct Back Light Troffer	F = Frosted	2 = 2' x 2' 4 = 2' x 4'	U = 120-277V	RGBW =