

Direct8™
LED



T8 Tubes

Type A Instant /
Programmed
Start Ballasts

TCP's Direct8 tubes are the perfect replacement for old fluorescent lighting. Remove the existing T8 fluorescent and replace with Direct8 Type A plug and play tubes. These tubes feature multiple ballast compatibility including Instant Start, Programmed Start, Rapid Start, and Dimmable ballasts.

Reasons to choose the LED T8 IS/PS Tubes from TCP

- >50% Energy savings over traditional fluorescent
- 50,000 hour life minimizes the need for replacements and labor costs
- Compatible with Instant, Rapid or Programmed Start ballasts and most traditional fluorescent ballasts
- No rewiring of fixture necessary
- Dimmable (0-10V dimming ballasts recommended)
- Instant on/off
- No mercury – great for all environments
- Rated for enclosed fixtures
- 4' tubes and U6 tube options available
- No UV

Ideal Applications

- Offices
- Retail Stores
- Schools
- Restaurants
- Lobbies
- Hospitals

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

RECOGNIZED
COMPONENT



Intertek
4005203

CONFORMS TO NSF STD. 2



To view our DLC qualified products, please
consult the DLC Qualified Products List
at www.designlights.org/apl.



5 YEAR
WARRANTY
*Based on 12 hours
use per day



DiracT8 IS/PS T8 Tubes

Specifications:

Listing

UL/cUL Listed – damp location rated
DLC rated
Approved for open and enclosed fixtures
PET Coated is NSF Listed Std 2

LED T8 Tube
4 foot
L15T8-SC



LED T8 Tube
4 foot
L12T8PS



Warranty

Five years against defects in manufacturing



LED U-Bend T8 Tube
6 inch



Item #	Min Starting Temp	Max Operating Temp	Voltage	NSF 2 Rated	Beam Angle	Field Angle*	PF	THD**
L12T8PS	-20C / -4F	45C / 113C	120-277, 347V	no	190°	310°	> .99	< 8%
L13T8U	-20C / -4F	45C / 113C	120-277, 347V	no	160°	325°	> .99	< 8%
L15T8-SC	-20C / -4F	45C / 113C	120-277, 347V	yes	160°	300°	> .99	< 8%

NOTE: Use shunted sockets for Instant Start ballasts. Use unshunted sockets for Rapid, Programmed, and Dimmable ballasts.

*Calculated **At 120v, ballast dependent

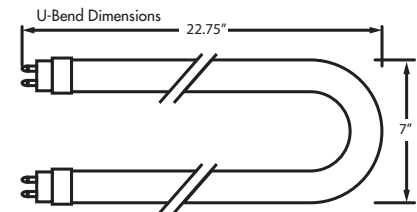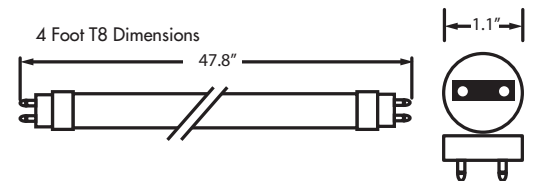

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

RECOGNIZED
COMPONENT



Intertek
4005203

CONFORMS TO NSF STD. 2



To view our DLC qualified products, please
consult the DLC Qualified Products List
at www.designlights.org/qpl.



5 YEAR
WARRANTY

*Based on 12 hours
use per day



DirecT8 IS/PS T8 Tubes

DirecT8 IS/PS T8 Tubes

				System Watts*			Initial Lumens*					REPL				War-		Master		
Item#	Description	DLC	LED Watts	LBF	NBF	HBF	LBF	NBF	HBF	NBF System LPW	CRI	Flour. Watts	MOL	DIA	Base	Color Temp	ranty Years			
LED T8 ALL GLASS – 50,000 HOURS																			DLC LOOK-UP# LFT84FTXXEA	
L12T8PS5030K	LED 12W 4' T8 IS/PS 30K	★	12W	13.0	14.9	21.5	1260	1700	2280	114.1	80	32W	47.8	1.0	G13	3000K	5	25		
L12T8PS5035K	LED 12W 4' T8 IS/PS 35K	★	12W	13.0	14.9	21.5	1300	1750	2340	117.4	80	32W	47.8	1.0	G13	3500K	5	25		
L12T8PS5041K	LED 12W 4' T8 IS/PS 41K	★	12W	13.0	14.9	21.5	1340	1800	2400	120.8	80	32W	47.8	1.0	G13	4100K	5	25		
L12T8PS5050K	LED 12W 4' T8 IS/PS 50K	★	12W	13.0	14.9	21.5	1380	1850	2480	124.2	80	32W	47.8	1.0	G13	5000K	5	25		
LED T8 PLASTIC – 50,000 HOURS																				
T80414095P	LED 15W 4' T8 IS/PS 41K 90		12	13.0	14.9	21.5	1050	1400	1850	94.0	90	32W	47.8	1.0	G13	4100K	5	25		
LED T8 PET COATED GLASS – 50,000 HOURS																			DLC LOOK-UP L15T8D50XXKSC (NSF RATED)	
L15T8D5030KSC	LED 15W 4' T8 IS/RS SC 30K	★	15W	14.5	18	21.5	1600	2000	2350	111.1	80	32W	47.8	1.0	G13	3000K	5	25		
L15T8D5035KSC	LED 15W 4' T8 IS/RS SC 35K	★	15W	14.5	18	21.5	1600	2000	2350	111.1	80	32W	47.8	1.0	G13	3500K	5	25		
L15T8D5041KSC	LED 15W 4' T8 IS/RS SC 41K	★	15W	14.5	18	21.5	1650	2050	2450	113.9	80	32W	47.8	1.0	G13	4100K	5	25		
L15T8D5050KSC	LED 15W 4' T8 IS/RS SC 50K	★	15W	14.5	18	21.5	1700	2200	2500	122.2	80	32W	47.8	1.0	G13	5000K	5	25		
LED T8 U6 PLASTIC – 50,000 HOURS																			DLC LOOK-UP L13T8UD50XXK	
L13T8UD5030K	LED 13W U6 T8 IS/RS 30K	★	13W	13	16.0	22.0	1400	1800	2500	112.5	80	32W	22.5	7.0	G13	3000K	5	12		
L13T8UD5035K	LED 13W U6 T8 IS/RS 35K	★	13W	13	16.0	22.0	1400	1800	2500	112.5	80	32W	22.5	7.0	G13	3500K	5	12		
L13T8UD5041K	LED 13W U6 T8 IS/RS 41K	★	13W	13	16.0	22.0	1450	1850	2550	115.6	80	32W	22.5	7.0	G13	4100K	5	12		
L13T8UD5050K	LED 13W U6 T8 IS/RS 50K	★	13W	13	16.0	22.0	1500	1900	2600	118.8	80	32W	22.5	7.0	G13	5000K	5	12		

* Nominal Values. Actual values vary depending on electronic ballast used.

Ballast compatibility tests are performed under a controlled lab environment. Field conditions may vary from this type of environment. Ballasts may differ by age and could have undergone revisions under the same item number affecting compatibility. Compatibility may also extend beyond this list. TCP recommends trying a few ballast-lamp combinations in an on-site test to ensure compatibility and performance before a major installation.

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

RECOGNIZED
COMPONENT



Intertek
4005203

CONFORMS TO NSF STD. 2



To view our DLC qualified products, please
consult the DLC Qualified Products List
at www.designlights.org/apl.



5 YEAR
WARRANTY

*Based on 12 hours
use per day



Direct8 IS/PS T8 Tubes

Instant Start Electronic Ballasts Compatible with LED Direct8™ for L12T8PS50XXK Series

Manufacturer	Model #	Voltage
GE	GE132MAX-L/ULTRA	UNV
	GE132MAX-P-N/ULTRA	UNV
	GE232MAX347-N	347
	GE232MAX-N/ULTRA	UNV
	GE232MAX-G-N	UNV
	GE232MAX-G-N/ULTRA	UNV
	GE232MAX-P-N/ULTRA	UNV
	GE232MAX-H/ULTRA	UNV
	GE232MAX-P-H/ULTRA	UNV
	GE232MAX-P-L/ULTRA	UNV
	GE332MAX-L/ULTRA	UNV
	GE332MAX-N/ULTRA	UNV
	GE332MAX-P-N/ULTRA	UNV
	GE332MAX-G-N	UNV
	GE332MAX-H/ULTRA	UNV
	GE432MAX-P-L/ULTRA	UNV
	GE432MAX-P-L/ULTRA	UNV
	GE432MAX-N/ULTRA	UNV
	GE432MAX-G-N	UNV
	GE432MAX-N/ULTRA	UNV
	GE432MAX-H/ULTRA	UNV
	GE432MAX-P-H/ULTRA	UNV
Osram/Sylvania	QHE2X32T8/UNV ISN-SC	UNV
	QHE2X32T8/UNV ISL-SC	UNV
	QHE2X32T8/UNV ISH-SC	UNV
	QHE2X32T8/347 ISN-SC	347
	QHE4X32T8/UNV ISN-SC	UNV
	QHE4X32T8/UNV ISL-SC	UNV
	QHE4X32T8/UNV ISH-SC	UNV
	QHE4X32T8/UNV ISH	UNV
	QTP2X32T8/UNV ISN-SC	UNV
	QTP3X32T8/UNV ISN-SC	UNV
	QTP2X32T8/UNV ISL-SC	UNV
	QTP3X32T8/UNV ISL-SC	UNV
Philips/Advance	IOPA-2P32-LW-N	UNV
	IOPA-3P32-LW-N	UNV
	IOPA-4P32-LW-N	UNV
	IOPA-2P32-N	UNV
	IOPA-3P32-N	UNV
	IOPA-4P32-N	UNV
	IOPA-2P32-HL-N	UNV
	IOPA-3P32-HL-N	UNV
	IOPA-2P32-LW-SC	UNV
	IOPA-4P32-LW-SC	UNV
	IOP-2P32-LW-N	UNV
	IOP-3P32-LW-N	UNV
	IOP-4P32-LW-N	UNV
	IOP-2P32-N	UNV
	IOP-3P32-N	UNV
	ICN-1P32-N	UNV
	ICN-2P32-N	UNV
	ICN-3P32-N	UNV

Manufacturer	Model #	Voltage
Philips/Advance (cont)	ICN-2P32-SC	UNV
	ICN-3P32-N	UNV
	ICN-4P32-N	UNV
	GOPA-2P32-N	347
	GOPA-2P32-SC	347
	GOPA-4P32-SC	347
	IOP-3P32-HL-90L-SC	UNV
	VEL-4P32-SC	UNV
	GEL-2P32-SC	347
	GOPA-2P32-N	347
	GEL-3P32-SC	347
	GEL-3P32-RH-TP	UNV
	GEL-4P32-RH-TP	UNV
	REL-2P32-SC	UNV
	REL-2P32-RH-TP	UNV
	VEL-2P32-SC	UNV
	REL-2P32-SC	UNV
	VOP-2P32-LW	UNV
TCP	E2P32ISUNVE	UNV
	E2P32ISUNVHE	UNV
	E2P32ISUNVLE	UNV
	E3P32ISUNVE	UNV
	E3P32ISUNVHE	UNV
	E3P32ISUNVLE	UNV
	E4P32ISUNVE	UNV
	E4P32ISUNVHE	UNV
	E4P32ISUNVLE	UNV
	E2P32IS120RES	120
Universal/Triad	B132IUNVHP-N	UNV
	B232I120RHA	UNV
	B232IUNVHP-N	UNV
	B232IUNVEL-A	UNV
	B332IUNVHP-A	UNV
	B232I277RHA	277
	B232IUNVEL-A rev D	UNV
	B432IUNVHP-A	UNV
	B432I277RHA	277
	B432I120RHA	120
ESPEN	B23IUNVHP-N010C	UNV
	VE2P32MVHIPE	UNV
	VE4P32MVHIPE	UNV
Standard	E432T8IS120/N/AS	UNV
	E232T8IS120/N/AS	UNV
	E432PI347GO/347	347
	E232T8IS347/H/90C	347
	E432T8IS347/H/90C	347
Keystone	KTEB-232-UVIS-N-P	UNV

Emergency Ballasts Compatible with LED Direct8™

Manufacturer	Model #	Voltage
IOTA	I-320	I-320
Bodine	B30	B30
	B50	B50
TCP	20B50	

*Requires 5 minutes of warm up time

Instant Start Ballasts Not Recommended for use with LED Direct8 include:

Philips/Advance: IOP-3P32-LW-SC, IOP-2P32-LW-SC



DirecT8 IS/PS T8 Tubes

Program Start Electronic Ballasts Compatible with LED DirecT8™ for L12T8PS50XXK Series

Manufacturer	Model #	Voltage
Advance	IOP-2PSP32-N	UNV
	IOP-3PSP32-SC	UNV
	IOP-4PSP32-SC	UNV
	GOP-2PSP32-SC	UNV
	GOP-4PSP32-SC	UNV
	IOP-3S32-SC	UNV
GE	GE-232-MVPS-N	UNV
	GE-232-MVPS-L	UNV
	GE-232MAXP-N/ULTRA	UNV
	GE232MAX-H/ULTRA	UNV
	GE332-MVPS-N	UNV
	GE332-MVPS-H	UNV
	GE432-MVPS-N	UNV
	GE432-MVPS-H	UNV
	GE432-MVPS-L	UNV
	GE432-MAX-N/ULTRA	UNV
OSRAM	QHE-2x32T8/UNV PSN-MC	UNV
	QHE-2x32T8/UNV PSH-HT	UNV
	QHE 3x32T8/UNV PSN-SC	UNV
	QHE 4x32T8/UNV PSN-SC	UNV
	QHE 4x32T8/UNV PSH-HT	UNV
	QTP2X32T8/UNV PSN-TC	UNV
TCP	E2P32PSUNVE	UNV
	E3P32PSUNVE	UNV
	E4P32PSUNVE	UNV
	E2P32PSUNVHE	UNV
	E3P32PSUNVHE	UNV
	E4P32PSUNVHE	UNV
	E2P32PSUNVLE	UNV
	E3P32PSUNVLE	UNV
	E4P32PSUNVLE	UNV
Triad	2S32PSUNVHE	UNV
	B232PUNVHE-B	UNV

Dimmer Ballasts

Manufacturer	Model #	Voltage
1 Lamp Program Start Dim		UNV
Philips/Advance	IZT-132-SC	UNV
2 Lamp Program Start Dim		UNV
Philips/Advance	IZT-2S32-SC	UNV
	IZT-2PSP32-SC	UNV

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

RECOGNIZED
COMPONENT



Intertek
1005203

CONFORMS TO NSF STD. 2



To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/apl.



5 YEAR
WARRANTY
*Based on 12 hours
use per day



Direct8 IS/PS T8 Tubes

Electronic Ballasts Compatible with LED Direct8™ for L15T8D50XXKSC and L13T8UD50XXK Series

Instant Start Ballasts

Brand	Model #	Four Lamp 120V 277V		Three Lamp 120V 277V		Two Lamp 120V 277V		One Lamp 120V 277V	
Advance	ICN-1P32-N	-	-	-	-	-	-	Y	Y
	ICN-2P32-N	-	-	-	-	Y	Y	N	N
	ICN-3P32-N	-	-	Y	Y	Y	Y	-	-
	ICN-4P32-N	Y	Y	Y	Y	-	-	-	-
	ICN-2P32-SC	-	-	-	-	Y	Y	Y	Y
	ICN-4P32-SC	N	Y	N	Y	-	-	-	-
	IOPA-1P32-N	-	-	-	-	Y	Y	N	N
	IOPA-4P32-N	Y	Y	Y	Y	-	-	-	-
	IOPA-1P32-LV-N	-	-	-	-	-	-	N	N
	IOPA-2P32-LV-N	-	-	-	-	Y	Y	N	N
	IOPA-4P32-LV-N	Y	Y	Y	Y	-	-	-	-
	REL-2P32-SC	-	-	-	-	Y	-	Y	-
	REL-4P32-RHTP	N	-	N	-	-	-	-	-
Espec	VE232MVHHP	-	-	-	-	Y	Y	Y	Y
	VE232MVHHP-E	-	-	-	-	Y	Y	Y	Y
	VE232MVHHPHE	-	-	-	-	Y	Y	N	N
	VE432MVHHP	Y	Y	Y	Y	-	-	-	-
	VE432MVHHP-E	Y	Y	Y	Y	-	-	-	-
Fulham	NPY-120-432-T8B	Y	-	Y	-	-	-	-	-
	NPY-120-432-T8IS	Y	-	Y	-	-	-	-	-
	WHCG3-120-T8IS	-	-	Y	-	Y	-	-	-
	WH2-120L	-	-	-	-	-	-	Y	-
Fusion	WH5-120L	Y	-	N	-	-	-	-	-
	FB232MVE	-	-	-	-	Y	Y	Y	Y
	FB232MVEHE	-	-	-	-	Y	Y	Y	Y
	FB232MVE-LHE	-	-	-	-	Y	-	Y	-
	FB332MVE	-	-	Y	Y	Y	Y	-	-
	FB432MVE	N	N	N	N	-	-	-	-
GE	FB432MVEHE	N	N	N	N	-	-	-	-
	GE132MAXP-N/ULTRA	-	-	-	-	-	-	Y	Y
	GE232-120RES-DIYB	-	-	-	-	Y	-	Y	-
	GE232MAX-G-N	-	-	-	-	Y	Y	Y	Y
	GE232MAXPL/ULTRA	-	-	-	-	Y	Y	Y	Y
	GE232MAXP-N/ULTRA	-	-	-	-	Y	Y	Y	Y
	GE232MAXPH/ULTRA	-	-	-	-	Y	Y	N	N
	GE232-MV-N	-	-	-	-	Y	Y	Y	Y
	GE332MAXL/ULTRA	-	-	Y	Y	Y	Y	-	-
	GE332MAX90-V60	-	-	Y	Y	N	N	-	-
	GE332MV-N-DIY	-	-	Y	Y	Y	Y	-	-
	GE432MAX-G-N	Y	Y	Y	Y	-	-	-	-
	GE432MAXH/ULTRA	Y	Y	Y	Y	-	-	-	-
	GE432MAXH-42T	Y	Y	Y	Y	-	-	-	-
Howard	EP3/32IS/MV/SC/HE	-	-	Y	Y	Y	Y	-	-
	EP4/32IS/MV/MC/HE	Y	Y	Y	Y	-	-	-	-
Keystone	KTEB-232-UVISN-P	-	-	-	-	Y	Y	Y	Y
	KTEB-332-UVISN-P	-	-	Y	Y	Y	Y	-	-
	KTEB-432-UVISN-P	Y	Y	Y	Y	-	-	-	-

Instant Start Ballasts

Brand	Model #	Four Lamp 120V 277V		Three Lamp 120V 277V		Two Lamp 120V 277V		One Lamp 120V 277V	
Osram	GHE 2x32T8/UNV ISL SC	-	-	-	-	Y	Y	Y	Y
	GTP 2x32T8/UNV ISN-SC	-	-	-	-	Y	Y	Y	Y
	GHE 4x32T8/UNV ISL SC	Y	Y	Y	Y	-	-	-	-
	GTP 4x32T8/UNV ISN-SC	Y	Y	Y	Y	-	-	-	-
Standard	E232PI120L	-	-	-	-	Y	-	Y	-
	E232T8IS120/L/AS	-	-	-	-	Y	-	Y	-
	E232T8IS120/N/AS	-	-	-	-	Y	-	Y	-
	E432T8IS120/H	Y	-	N	-	-	-	-	-
	E432T8IS120/L/AS/BULK	Y	-	Y	-	-	-	-	-
Universal	E432T8IS120/N/AS/BULK	Y	-	Y	-	-	-	-	-
	B232IUNVHP-N	-	-	-	-	Y	Y	-	-
	B332IUNVHP-A	-	-	Y	Y	Y	Y	-	-
	B432IUNVHP-A	Y	Y	Y	Y	-	-	-	-

Rapid Start Ballasts

Brand	Model #	Four Lamp 120V 277V		Three Lamp 120V 277V		Two Lamp 120V 277V		One Lamp 120V 277V	
Advance	ICN-2S40-N	-	-	-	-	Y	Y	Y	Y
	REL-2S40-N	-	-	-	-	Y	-	N	-
Fulham	WHCG5-120-T12-RS	-	-	-	-	Y	-	Y	-

Programmed Start Ballasts

Brand	Model #	Four Lamp 120V 277V		Three Lamp 120V 277V		Two Lamp 120V 277V		One Lamp 120V 277V	
Advance	IOP-4PSP32-SC	Y	Y	Y	Y	-	-	-	-
	RCN-2S32-SC	-	-	-	-	Y	-	-	-
Fulham	NPY-120-232-LT8	-	-	-	-	Y	-	Y	-
Fusion	FB232MVE-PPS-HE	-	-	-	-	Y	Y	Y	Y
	FB432MVE-PPS-HE	Y	Y	Y	Y	-	-	-	-
GE	GE232-120-PS-N	-	-	-	-	Y	-	Y	-
	GE232-MVPS-L	-	-	-	-	Y	Y	Y	Y
	GE232-MVPS-N	-	-	-	-	Y	Y	Y	Y
	GE232-MVPS-H	-	-	-	-	Y	Y	N	N
Osram	GTP 3x32T8/UNV PSX-SC	-	-	N	N	-	-	-	-
	GHE 4x32T8/UNV PSN-SC	Y	Y	Y	Y	-	-	-	-
Robertson	RSW240T12120	-	-	-	-	N	-	N	-
Standard	E232T8PS120-277/N/AS/BULK	-	-	-	-	Y	Y	-	-
TCP	E4P32PSUNVE	Y	Y	Y	Y	-	-	-	-
Universal	B232PUNVHE-B	-	-	-	-	Y	Y	N	N

Dimming Ballasts

Brand	Model #	Four Lamp 120V 277V		Three Lamp 120V 277V		Two Lamp 120V 277V		One Lamp 120V 277V	
Advance	REZ-2S32-SC	-	-	-	-	Y	-	-	-
GE	GE332MAX90-V60	-	-	Y	Y	N	N	-	-
Keystone	KTEB-232-UV-PSVDIM	-	-	-	-	Y	Y	-	-
Osram	GHE 2x32T8/UNV DIM-TC	-	-	-	-	Y	Y	-	-
Universal	B232PUSV3PLA	-	-	-	-	Y	Y	Y	Y
	B232SR120S30	-	-	-	-	N	-	-	-

RECOGNIZED
COMPONENT



Intertek
4005203

CONFORMS TO NSF STD. 2



To view our DLC qualified products, please
consult the DLC Qualified Products List
at www.designlights.org/qpl.



5 YEAR
WARRANTY

*Based on 12 hours
use per day

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com



DirecT8 IS/PS T8 Tubes

LED T8 Ballast Compatibility Guides for LI5T8D50XXKSC and LI3T8UD50XXK 347/480v Series

Brand	Model #	Start Method	Four Lamp		Three Lamp		Two Lamp		One Lamp	
			347V	480V	347V	480V	347V	480V	347V	480V
Arcata	ACT2P32IS347	IS	–	–	–	–	Y	Y	Y	Y
	ACT4P32IS347	IS	Y	Y	Y	Y	–	–	–	–
Advance	GOPA-2P32-LW-N	IS	–	–	–	–	N	–	Y	–
	GOPA-2P32-LW-SC	IS	–	–	–	–	Y	–	Y	–
	GOPA-4P32-LW-SC	IS	Y	–	Y	–	–	–	–	–
	GOPA-2P32-SC	IS	–	–	–	–	Y	–	Y	–
	GOPA-4P32-SC	IS	Y	–	Y	–	–	–	–	–
Fusion	FB232347E-HE	IS	–	–	–	–	Y	–	Y	–
	FB232347E-L	IS	–	–	–	–	Y	–	Y	–
	FB232347E-PPS-HE	PS	–	–	–	–	Y	–	Y	–
	FB432347E-HE	IS	Y	–	Y	–	–	–	–	–
	FB432347E-L	IS	Y	–	Y	–	–	–	–	–
	FB432347E-PPS-HE	PS	Y	–	Y	–	–	–	–	–
GE	GE232MAX347H	IS	–	–	–	–	Y	–	N	–
	GE332MAX347H	IS	–	–	Y	–	N	–	–	–
	GE432MAX347H	IS	N	–	N	–	–	–	–	–
Magnetek	B232I347HP	IS	–	–	–	–	N	–	N	–
Osram	QHE 2x32 T8/347 ISL-SC	IS	–	–	–	–	Y	–	Y	–
	QHE 2x32 T8/347 ISN-SC	IS	–	–	–	–	Y	–	Y	–
	QHE 4x32 T8/347 ISL-SC	IS	Y	–	Y	–	–	–	–	–
Standard	E232T8IS347/H/90C	IS	–	–	–	–	N	–	N	–
	E232T8IS347/L/BULK	IS	–	–	–	–	Y	–	Y	–
	E232T8IS347/N/BULK	IS	–	–	–	–	Y	–	Y	–
	E432R347G01	IS	Y	–	N	–	–	–	–	–
	E432T8IS347/L/BULK	IS	Y	–	Y	–	–	–	–	–
	E432T8IS347/N	IS	Y	–	Y	–	–	–	–	–
	E432T8IS347/N/BULK	IS	N	–	N	–	–	–	–	–
	E432T8IS347/H/90C	IS	N	–	N	–	–	–	–	–
Universal	B232I347HEA	IS	–	–	–	–	Y	–	Y	–
	B432I347HEA	IS	Y	–	Y	–	–	–	–	–
	B432I347RH	IS	Y	–	Y	–	–	–	–	–

Ballast compatibility tests are performed under a controlled lab environment. Field conditions may vary from this type of environment. Ballasts may differ by age and could have undergone revisions under the same item number affecting compatibility. Compatibility may also extend beyond this list. TCP recommends trying a few ballast-lamp combinations in an on-site test to ensure compatibility and performance before a major installation.

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

©TCP APR 2021/WF224554

RECOGNIZED
COMPONENT



Intertek
1005203

CONFORMS TO NSF STD. 2



To view our DLC qualified products, please
consult the DLC Qualified Products List
at www.designlights.org/apl.



5 YEAR
WARRANTY
*Based on 12 hours
use per day

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcpi.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516