

Industra

by TCP

LED HBM Series Modular High Bay Product Specifications



The LED HBM Series Modular High Bay features a lightweight, customizable design that provides exceptional light distribution for mounting heights up to 60 feet. This durable, 70° C rated, fixture efficiently delivers over 150 LPW of bright, white, uniform light to maximize energy savings and utility rebates. The long 50,000 hour rated life significantly decreases maintenance, labor, and material costs over the life of the fixture. A 0-10V dimming driver comes standard, enabling easy integration with a variety of controls options.

Reasons to choose the LED HBM Series High Bay from TCP

- Built for extreme temperatures: 70° C Rated
- Instant on, no warm up time for full light
- Modular design allows for limitless customization
- Long life: 50,000 hours
- Energy efficient: Up to 67% energy savings compared to HID equivalents
- Durable light weight Aluminum housing
- Smooth, uniform dimming (0-10V) standard

Ideal Applications


- Steel Mills
- Commercial Facilities
- Open Ceiling Designs
- Paper Mills
- Field Houses & Gymnasiums
- Warehouse and Distribution Centers
- Heavy Industrial Plants



Specifications

Input Line Voltage	120-277 VAC
Input Line Frequency (Hz)	50/60HZ
Wattage (W).....	200W
Lumens (L).....	30,000L
Lumens per Watt(LPW).....	>150LPW
Rated Life.....	50,000 hours
Minimum Starting Temperature	-40°C (-40°F)
Maximum Operating Temperature.....	70°C(158°F)*
CRI	>82
Power Factor	>0.90
THD.....	<20%
Ratings	cULus wet location rated, IP66
Controls.....	0-10V dimming (standard)

*Maximum Operating Temperature decreases to 55°C when additional units are assembled together

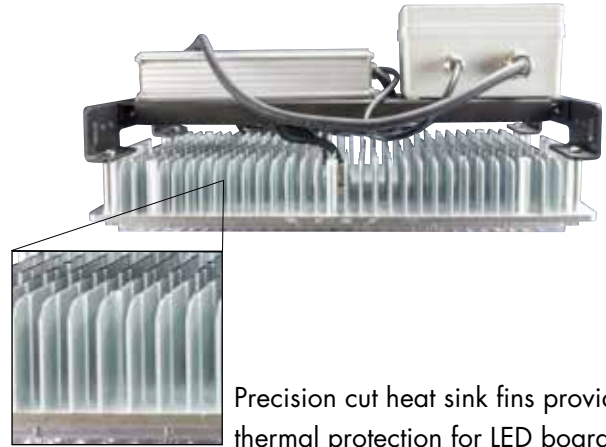


Precision cut heat sink fins provide thermal protection for LED board

Unlimited customization due to modular design: HBMUZDA450K90D utilized below

Side by side assembly resulting in a 400W Luminaire

End to end assembly resulting in a 400W Luminaire

End to end assembly resulting in a 600W Luminaire

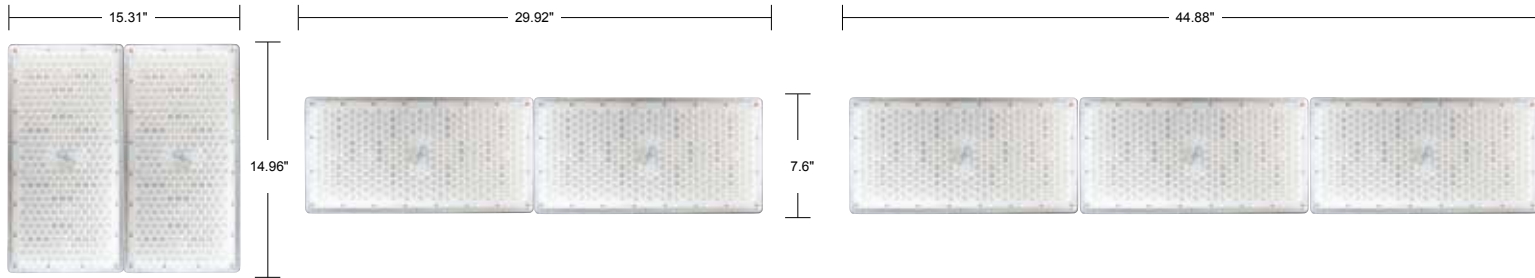

Order consists of:
 - (2) HBMUZDA450K90D
 - (1) HBMPTBAG
 - (2) EXPYHANGKIT1OFT

Order consists of:
 - (2) HBMUZDA450K90D
 - (1) HBMPTBAG
 - (2) EXPYHANGKIT1OFT

Order consists of:
 - (3) HBMUZDA450K90D
 - (2) HBMPTBAG
 - (3) EXPYHANGKIT1OFT

Replacement Strategy

SYSTEM	FIXTURE CONFIGURATION	TOTAL FIXTURE WATTAGE	LED ENERGY SAVINGS
TCP HBM Series - 30,000 lumens	(1) 200W Luminaire	200	—
400W Metal Halide		458	56%
TCP HBM Series - 60,000 lumens	(2) 200W Luminaires	400	—
1000W Metal Halide		1081	63%

Applications

The TCP LED HBM Series Modular High Bay is ideal for replacing traditional metal halide high bay systems in high temperature environments. Primary applications include steel mills and other heavy industrial plants, commercial facilities, manufacturing facilities, field houses and other applications with a suggested mounting height up to 60'. Benefits include high efficiency, excellent color rendering, long life, instant on, and a modular design that will satisfy the most complex of lighting applications.

Construction

- Durable, light weight aluminum body
- Finish: powder coated, post-painted black
- Modular design: unlimited lighting design solutions
- Lightweight, low-profile design
- 6FT power cord comes standard

Electrical

- cULus damp location rated
- 0-10V dimming driver (standard)
- Easy-to-access wiring compartment
- System rated for long 50,000 hour life
- Efficiently delivers >150 LPW

Optics

- High impact, clear acrylic lens comes standard to protect the LEDs and minimize glare
- Delivers bright, white light and excellent uniformity
- 90 degree optics designed for high ceiling applications



Listings

UL/cUL Wet Location Listed
RoHS Compliant

Warranty

Five year limited warranty against defects in manufacturing.*

*Warranty is valid when operating in ambient temperatures below 167°F/70°C for one single fixture. Warrantied maximum operating temp drops to 131°F/55°C when 2 or 3 three fixtures are assembled together.

Lumen Maintenance Factor (LMF)

Lumen Package	36,000 hours ¹	50,000 hours ¹	100,000 hours ²	Reported L ₇₀ (hours)
A4	98.59%	98.04%	96.10%	>54,000

¹ IESNA TM-21-11 projected value based on 6X IESNA LM-80-08 total test duration.

² IESNA TM-21-11 calculated value exceeds 6X IESNA LM-80-08 total test duration.

Catalog Ordering Matrix Example: HBMUZA450K90D

HBM	U	ZD			
FAMILY	VOLTAGE	CONTROLS/DIMMING	LUMEN PACKAGE (Power) ¹²	CCT	OPTIONS
HBM – LED High Temp Modular High Bay	U – 120V - 277V	ZD – 0-10V Dimming	A4 – 30,000 lumens (200W)	50K – 5000K	90D – 90° Beam Angle

Accessories:

¹ Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

² Actual wattage may differ by +/- 10%



Item Number	Description
HBMPTBAG	Parts bag for modular assembly
EXPYHANGKIT10FT	100lb rated cable Y-hook hanging kit (1 kit needed per fixture)

For the most up-to-date specs and warranty information, please visit www.tcpi.com

Industra by TCP LED HBM Series Modular High Bay


Dimensions and Mounting Data

Product Dimensions:

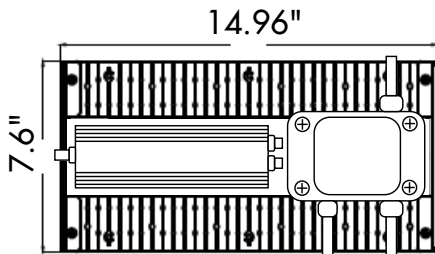


Weight: 9.8lbs

Mounting Details

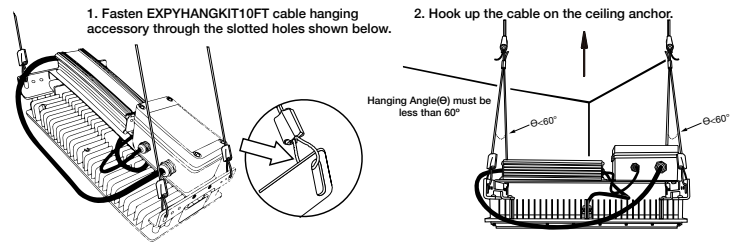


Modular Assembly

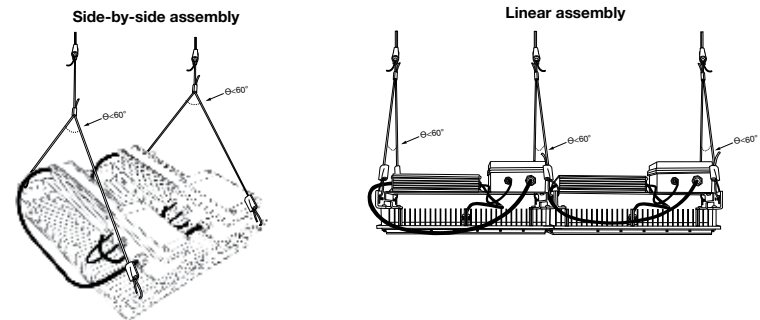

Photometric Report

Based on photometric data for
TCP Item #HBMUZDA450K90D

Polar Graph

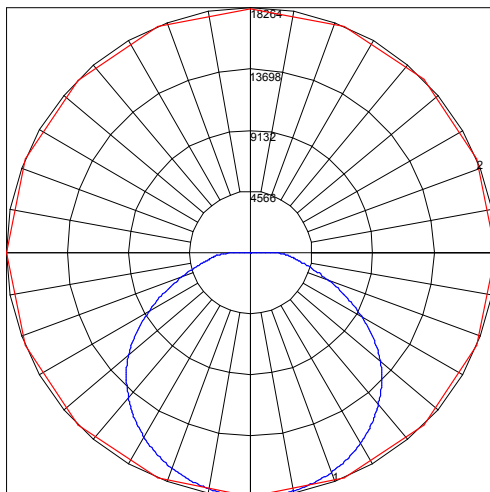

Maximum Candela = 18264 Located At Horizontal Angle = 337.5, Vertical Angle = 1.5
1 - Vertical Plane Through Horizontal Angles (337.5 - 157.5) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (1.5) (Through Max. Cd.)

Specifications and dimensions subject to change without notice.

For the most up-to-date specs and warranty information, please visit www.tcp.com

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	0
1	111	108	104	101	109	106	103	100	101	99	97	98	96	94	94	93	91	89	89	89	89	89	89	89
2	103	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	80	79	79	79	79	79	79	79
3	96	87	81	76	94	86	80	75	83	78	74	81	76	72	78	74	71	69	69	69	69	69	69	69
4	89	79	72	66	87	78	71	66	76	70	65	73	68	64	71	67	63	62	62	62	62	62	62	62
5	83	72	64	59	81	71	64	58	69	63	58	67	62	57	65	61	57	55	55	55	55	55	55	55
6	77	66	58	53	76	65	58	52	63	57	52	62	56	52	60	55	51	49	49	49	49	49	49	49
7	72	60	53	47	71	60	52	47	58	52	47	57	51	47	56	50	46	45	45	45	45	45	45	45
8	68	56	48	43	66	55	48	43	54	47	43	53	47	43	52	46	42	41	41	41	41	41	41	41
9	64	52	44	39	62	51	44	39	50	44	39	49	43	39	48	43	39	37	37	37	37	37	37	37
10	60	48	41	36	59	48	41	36	47	40	36	46	40	36	45	40	36	34	34	34	34	34	34	34

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-20	6039.6	20.8
0-30	12019.4	41.3
0-40	18384.7	63.2
0-50	23779.2	81.8
0-60	26984.6	92.8
0-70	28447.9	97.9
0-80	28971.8	99.7
0-90	29072.5	100

Total Luminaire Efficiency = N.A.%

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516