



LED Selectable Commercial Recessed Downlights

Color & Wattage Selectable Product Specifications



TCP's Selectable Commercial Recessed Downlights offer choices for color temperatures and wattages, making these adaptable for many situations.

Reasons to choose LED Commercial Recessed Downlights from TCP

- 3 Selectable Wattages
- 5 Selectable Colors (30K/35K/41K) (27K/50K)
- 50,000 hours life minimizes replacement and maintenance costs
- Flicker Free Design for consistent lighting
- Mounts directly to ceiling: 4, 6, 8, 10 or 12 inch
- Shatter resistant
- Energy Star Rated
- Matte Silver Finish
- Easy installation and integrated trim
- Snap clips allow for installation without a recessed can
- 85° beam angle (4"/6"/8"/10")
- 70° beam angle (12")
- Smooth, uniform dimming from 100 - 5%


Ideal Applications

- Commercial
- Retail
- Industrial
- Healthcare

Specifications:

Color Temperatures.....(30K/35K/41K) (27K/30K)
 Wattage Options 4" (7/9/12W), 6" (8/10/15W),
 8" (11/15/19W), 10" (18/23/30W),
 12" (18/23/30W)
 Input Line Voltage 120-277V
 Input Line Frequency..... 50/60HZ
 Dimming.....0-10V

Lamp Life (rated)..... 50,000 hours
 Minimum Starting Temp -22F/-30C
 Maximum Operating Temp..... 104°F/40°C
 CRI..... 80
 IC rated for direct contact with insulation
 UL approved for damp locations



Specifications:



Selectable Commercial Recessed Downlight Diffuser Version (30K,35K,41K)

ITEM #	DESCRIPTION	VOLTAGE	LED WATTS	REPLACEMENT WATTS	LUMENS									LPW	CRI
					LOWEST WATTAGE			MIDDLE WATTAGE			HIGHEST WATTAGE				
					3000K	3500K	4100K	3000K	3500K	4100K	3000K	3500K	4100K		
4" Selectable Commercial Recessed Downlight – 65 Watt Replacement • 50,000 Hour															
DLC4SWUZDCCT	LED 4" Comm Downlight CCT	120-277V	7/9/12	65	675	695	690	870	900	895	1150	1200	1190	LW:96.4/99.3/98.6 MW:96.7/100/99.4 HW: 95.8/100/99	80
6" Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour															
DLC6SWUZDCCT	LED 6" Comm Downlight CCT	120-277V	8/10/15	85	820	850	865	1030	1080	1095	1430	1530	1515	LW:103/106/108 MW:103/108/110 HW:95/102/101	80
8" Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour															
DLC8SWUZDCCT	LED 8" Comm Downlight CCT	120-277V	11/15/19	85	1270	1300	1305	1720	1705	1775	2085	2150	2085	LW:115.5/118.2/119 MW:115/113.7/118.3 HW:110/113.2/110	80
10" Selectable Commercial Recessed Downlight – 100 Watt Replacement • 50,000 Hour															
DLC10SWUZDCCT	LED 10" Comm Downlight CCT	120-277V	18/23/30	100	2100	2150	2150	2590	2660	2660	3205	3330	3305	LW:116.7/119.4/119.4 MW:112.6/115.7/115.7 HW:106.8/111/110.2	80
12" Selectable Commercial Recessed Downlight – 125 Watt Replacement • 50,000 Hour															
DLC12SWUZDCCT	LED 12" Comm Downlight CCT	120-277V	18/23/30	125	2110	2160	2180	2650	2690	2690	3260	3380	3360	LW:117.2/120/121.1 MW:115.2/117/117 HW:108.7/112.7/112	80

Specifications:

Selectable Commercial Recessed Downlight Diffuser Version (27K,50K)

ITEM #	DESCRIPTION	VOLTAGE	LED WATTS	REPLACEMENT WATTS	LUMENS						LPW	CRI
					LOWEST WATTAGE		MIDDLE WATTAGE		HIGHEST WATTAGE			
					2700K	5000K	2700K	5000K	2700K	5000K		
4" Selectable Commercial Recessed Downlight Diffuser Version – 65 Watt Replacement • 50,000 Hour												
DLC4SWUZDCCT2	LED 4" Comm Downlight Diffuser CCT	120-277V	7/9/12	65	700	750	900	1000	1200	1300	LW:100/107.1 MW:100/111.1 HW:100/108.3	80
6" Selectable Commercial Recessed Downlight Diffuser Version – 85 Watt Replacement • 50,000 Hour												
DLC6SWUZDCCT2	LED 6" Comm Downlight Diffuser CCT	120-277V	8/10/15	85	700	750	1000	1050	1450	1500	LW:87.5/93.8 MW:100/105 HW:96.7/100	80
8" Selectable Commercial Recessed Downlight Diffuser Version – 85 Watt Replacement • 50,000 Hour												
DLC8SWUZDCCT2	LED 8" Comm Downlight Diffuser CCT	120-277V	11/15/19	85	1200	1300	1600	1650	2000	2050	LW:109.1/118.2 MW:106.7/110 HW:105.3/107.9	80
10" Selectable Commercial Recessed Downlight Diffuser Version – 100 Watt Replacement • 50,000 Hour												
DLC10SWUZDCCT2	LED 10" Comm Downlight Diffuser CCT	120-277V	18/23/30	100	1800	1850	2250	2300	2850	2950	LW:100/102.8 MW:97.8/100 HW:95/98.3	80
12" Selectable Commercial Recessed Downlight Diffuser Version – 125 Watt Replacement • 50,000 Hour												
DLC12SWUZDCCT2	LED 12" Comm Downlight Diffuser CCT	120-277V	18/23/30	125	1800	1850	2250	2300	2850	2950	LW:100/102.8 MW:97.8/100 HW:95/98.3	80


Optional Accesories

ITEM NUMBER	DESCRIPTION	DIMENSIONS
EMBACKUPCOMDL1	EMERGENCY BACK UP FOR 4" AND 6" SELECTABLE COMMERCIAL DOWNLIGHT	9.45" X 1.77" X 1.18"
EMBACKUPCOMDL2	EMERGENCY BACK UP FOR 8", 10" AND 12" SELECTABLE COMMERCIAL DOWNLIGHT	12.9" X 2.6" X 2.2"



Dimensions:

A	B	C	Item Number
5"	6.2"	4.5"	DLC4SWUZDCCT / DLC4SWUZDCCT2
6.4"	7.8"	5.6"	DLC6SWUZDCCT / DLC6SWUZDCCT2
7.4"	9.2"	7.3"	DLC8SWUZDCCT / DLC8SWUZDCCT2
8.2"	10.9"	9"	DLC10SWUZDCCT / DLC10SWUZDCCT2
9.5"	13"	11"	DLC12SWUZDCCT / DLC12SWUZDCCT2

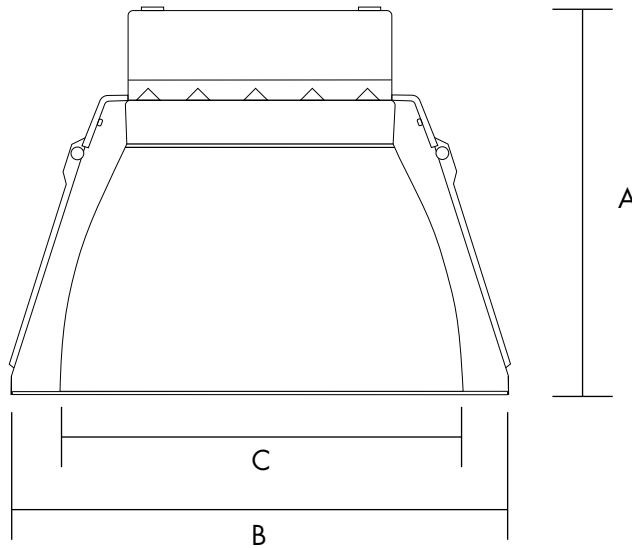

For the most up-to-date specs, please visit www.tcpi.com

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516