



LED Dimmable Snap-In Downlights

Product Specifications



Ultra-thin meets ultra easy with Snap-In Downlights from TCP. You no longer need a recessed can or a junction box – snap-in downlights can be directly mounted to drywall, drop ceilings and other locations. Simply shape a hole and place the downlight inside.

Reasons to choose the LED Dimmable Snap-in Downlights from TCP

- Frosted glass lens
- Snap-in mounting springs for use without junction box or recessed can
- Sturdy, steel-encased, separated LED driver with watertight seal
- Easy wiring access for quick install
- 65-120 watt incandescent equivalent
- Wide beam spread
- Triac dimming
- Damp location rated
- IC rated
- Long life: 40,000 hours
- Square or round form factor

Ideal Applications

- Commercial
- Industrial
- Retail
- Hospitality
- Residential
- Healthcare

Specifications:

Voltage 120 VAC
Input Power 13W, 14W, 18W
Input Line Frequency 50/60HZ
Lamp Life (Rated) 40,000 hours

Minimum Starting Temp -20°C
Maximum Operating Temp 40°C
CRI 80
Warranty 5 Years





LED Dimmable Snap-In Downlights

Specifications:



4" Round




6" Round




8" Round



4" Square



6" Square

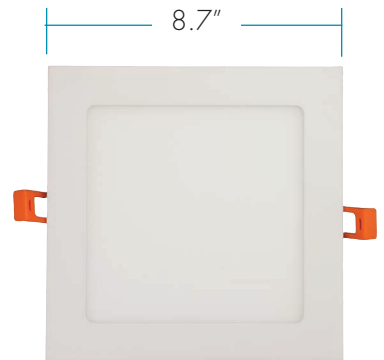

8" Square





LED Dimmable Snap-In Downlights

ITEM #	DESCRIPTION	WATTS	REPLACEMENT WATTS	VOLTAGE	LUMENS	LPW	CCT	CRI	BEAM ANGLE	MOL (inches)	DIA (inches)
ROUND SNAP-IN DOWNLIGHTS											
DDR40127	4" 850LM Round Downlight - 2700K	13	65	120	850	65.4	2700K	80	110°	0.8	4.6
DDR40130	4" 850LM Round Downlight - 3000K	13	65	120	850	65.4	3000K	80	110°	0.8	4.6
DDR40140	4" 850LM Round Downlight - 4000K	13	65	120	850	65.4	4000K	80	110°	0.8	4.6
DDR40150	4" 850LM Round Downlight - 5000K	13	65	120	850	65.4	5000K	80	110°	0.8	4.6
DDR60127	6" 1100LM Round Downlight - 2700K	14	85	120	1100	78.6	2700K	80	110°	0.8	6.7
DDR60130	6" 1100LM Round Downlight - 3000K	14	85	120	1100	78.6	3000K	80	110°	0.8	6.7
DDR60140	6" 1100LM Round Downlight - 4000K	14	85	120	1100	78.6	4000K	80	110°	0.8	6.7
DDR60150	6" 1100LM Round Downlight - 5000K	14	85	120	1100	78.6	5000K	80	110°	0.8	6.7
DDR80127	8" 1550LM Round Downlight - 2700K	18	120	120	1550	86.1	2700K	80	110°	0.8	8.7
DDR80130	8" 1550LM Round Downlight - 3000K	18	120	120	1550	86.1	3000K	80	110°	0.8	8.7
DDR80140	8" 1550LM Round Downlight - 4000K	18	120	120	1550	86.1	4000K	80	110°	0.8	8.7
DDR80150	8" 1550LM Round Downlight - 5000K	18	120	120	1550	86.1	5000K	80	110°	0.8	8.7
SQUARE SNAP-IN DOWNLIGHTS											
DDR40227	4" 750LM Square Downlight - 2700K	13	65	120	750	57.7	2700K	80	110°	0.8	4.6
DDR40230	4" 750LM Square Downlight - 3000K	13	65	120	750	57.7	3000K	80	110°	0.8	4.6
DDR40240	4" 750LM Square Downlight - 4000K	13	65	120	750	57.7	4000K	80	110°	0.8	4.6
DDR40250	4" 750LM Square Downlight - 5000K	13	65	120	750	57.7	5000K	80	110°	0.8	4.6
DDR60227	6" 1000LM Square Downlight - 2700K	14	85	120	1000	71.4	2700K	80	110°	0.8	6.6
DDR60230	6" 1000LM Square Downlight - 3000K	14	85	120	1000	71.4	3000K	80	110°	0.8	6.6
DDR60240	6" 1000LM Square Downlight - 4000K	14	85	120	1000	71.4	4000K	80	110°	0.8	6.6
DDR60250	6" 1000LM Square Downlight - 5000K	14	85	120	1000	71.4	5000K	80	110°	0.8	6.6
DDR80227	8" 1400LM Square Downlight - 2700K	18	120	120	1400	77.8	2700K	80	110°	0.8	8.7
DDR80230	8" 1400LM Square Downlight - 3000K	18	120	120	1400	77.8	3000K	80	110°	0.8	8.7
DDR80240	8" 1400LM Square Downlight - 4000K	18	120	120	1400	77.8	4000K	80	110°	0.8	8.7
DDR80250	8" 1400LM Square Downlight - 5000K	18	120	120	1400	77.8	5000K	80	110°	0.8	8.7

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP MAY 2023 /Wf233050



5 YEAR
WARRANTY
*Based on 12 hours
use per day

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit **tcpi.com**

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516