

Features & Benefits

Illumination

- Long lasting, efficient ultra-bright white LEDs.
- High-performance chrome-plated metalized reflector and polycarbonate lens for optimal light distribution.
- Adjustable LED lamp heads increase center-to-center spacing with 8 LEDs in each lamp head.

Electrical

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transformer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Back plate with universal knockout pattern for easy surface mount installation.
- Conduit mount knockout on top housing.
- Suitable for wall or ceiling mount.

Housing


- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black.

Warranty/Listing

- Five year warranty.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.



Dimensions:

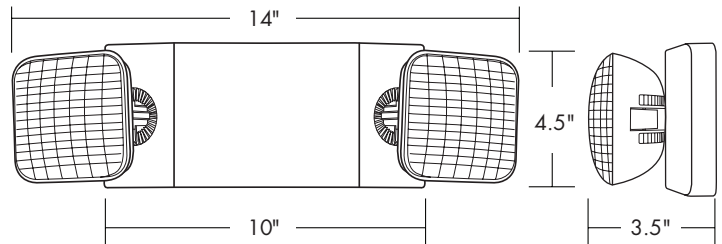

Ordering Information

Item #	Description	LED Color	Housing Color	TCP Traditional Equivalents
LEDWEL	White LED Emergency Light	White	White	20760, 20761
LEDWELRC	White LED Emergency Light, Remote Capable	White	White	20765
LEDWELSDT	White LED Emergency Light, Self Diagnostic Test	White	White	20766SD
LEDWELRCSDT	White LED Emergency Light, White Remote Capable, Self Diagnostic Test	White	White	27065, 20766SD

Specifications and dimensions subject to change without notice.

Specifications

UNIT LOCATION
LIGHT SOURCE

1	0.2	0.3	0.5	0.4	0.4	0.5	0.6	0.8	1.0	0.8	0.9	0.8	0.4	0.2	0.2
2	0.3	0.5	0.7	0.8	0.9	0.8	0.9	1.0	1.1	1.4	1.1	0.8	0.5	0.3	0.2
3	0.4	0.7	1.0	1.0	1.1	1.1	1.1	1.3	1.4	1.1	0.9	0.9	0.7	0.5	0.2
4	0.5	0.7	0.9	1.1	1.2	1.2	1.0	1.1	1.1	1.0	1.1	0.8	0.6	0.3	0.2
5	0.5	0.7	0.8	0.8	1.0	1.1	0.8	0.8	1.0	0.9	0.6	0.5	0.4	0.3	0.2
6	0.4	0.5	0.7	0.7	0.8	0.8	0.6	0.5	0.6	0.5	0.4	0.4	0.4	0.2	0.2
	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7

NFPA 101 Requirements for: 10' center-to-center spacing - 3' path of egress 1' from wall - 7 1/2' mounting height.

Specifications and dimensions subject to change without notice.

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516