



# LED Color Selectable Commercial Recessed Downlights with Triac Dimming




## LED Color Selectable Commercial Recessed Downlights with Triac Dimming

Color Selectable Product Specifications



### Dimensions

A	B	C	Item Number
5"	6.2"	4.5"	DLC4TRICCT/DLC4TRICCT2
6.4"	7.8"	5.6"	DLC6TRICCT/DLC6TRICCT2
7.4"	9.2"	7.3"	DLC8TRICCT/DLC8TRICCT2
8.2"	10.9"	9"	DLC10TRICCT/DLC10TRICCT2
9.5"	13"	11"	DLC12TRICCT/DLC12TRICCT2

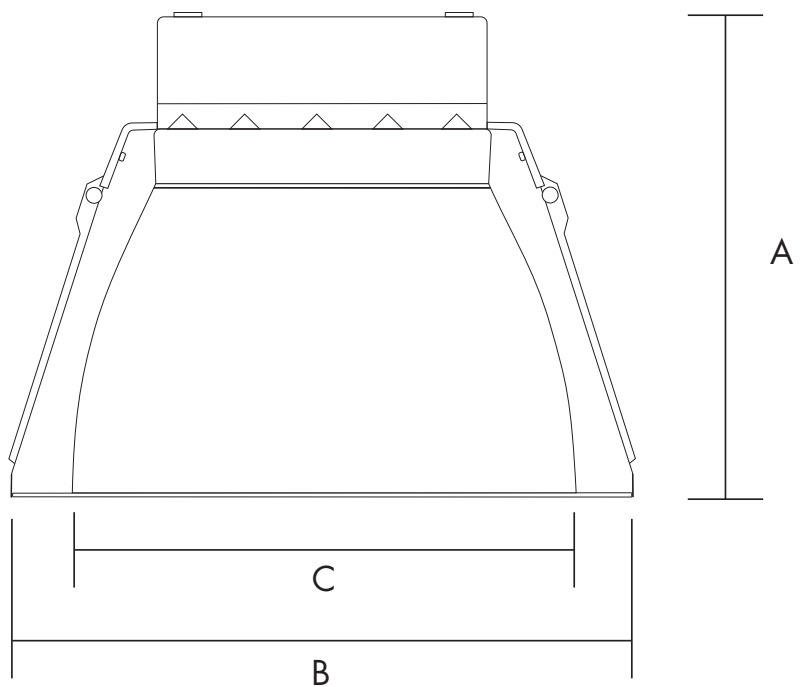

TCP's Color Selectable Commercial Recessed Downlights offer choices for color temperatures, making these adaptable for many situations.

### Reasons to choose LED Color Selectable Commercial Recessed Downlights from TCP

- Selectable colors (30K/35K/41K) or (27K/50K)
- 50,000 hour rated life minimizes replacement and maintenance costs
- Flicker-free design for consistent lighting
- Mounts directly to ceiling: 4, 6, 8, 10 or 12 inch
- Shatter resistant
- Matte silver finish
- Easy installation and integrated trim
- Snap clips allow for installation without a recessed can
- 85° beam angle (4"/6"/8"/10")
- 70° beam angle (12")
- Smooth, uniform triac dimming

### Ideal Applications

- Commercial
- Retail
- Industrial
- Healthcare

### Specifications

Color Temperatures.....(30K/35K/41K) or (27K/30K)	Lamp Life (rated)..... 50,000 hours
Wattages..... 12W, 15W, 19W or 30W	Minimum Starting Temp ..... -22°F/-30°C
Input Line Voltage..... 120V	Maximum Operating Temp..... 104°F/40°C
Input Line Frequency..... 50/60HZ	CRI..... 80
Dimming..... Triac	

IC rated for direct contact with insulation  
UL approved for damp locations

For the most up-to-date specs, please visit [www.tcpi.com](http://www.tcpi.com)



# LED Color Selectable Commercial Recessed Downlights with Triac Dimming



# LED Color Selectable Commercial Recessed Downlights with Triac Dimming

## Specifications



### Color Selectable Commercial Recessed Downlights (30K,35K,41K)

ITEM #	DESCRIPTION	VOLTAGE	INCAND. WATTS	WATTAGE	LUMENS			LPW	CRI
					30K	35K	41K		
<b>4" Color Selectable Commercial Recessed Downlight – 65 Watt Replacement • 50,000 Hour</b>									
DLC4TRICCT	LED 4" Comm Downlight CCT	120	65	12	1150	1200	1190	95.8/100/99	80
<b>6" Color Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour</b>									
DLC6TRICCT	LED 6" Comm Downlight CCT	120	85	15	1430	1530	1515	95/102/101	80
<b>8" Color Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour</b>									
DLC8TRICCT	LED 8" Comm Downlight CCT	120	85	19	2085	2150	2085	110/113.2/110	80
<b>10" Color Selectable Commercial Recessed Downlight – 100 Watt Replacement • 50,000 Hour</b>									
DLC10TRICCT	LED 10" Comm Downlight CCT	120	100	30	3205	3330	3305	106.8/111/110.2	80
<b>12" Color Selectable Commercial Recessed Downlight – 125 Watt Replacement • 50,000 Hour</b>									
DLC12TRICCT	LED 12" Comm Downlight CCT	120	125	30	3260	3380	3360	108.7/112.7/112	80

## Specifications

### Color Selectable Commercial Recessed Downlights (27K,50K)

ITEM #	DESCRIPTION	VOLTAGE	INCAND. WATTS	WATTAGE	LUMENS		LPW	CRI
					27K	50K		
<b>4" Selectable Commercial Recessed Downlight – 65 Watt Replacement • 50,000 Hour</b>								
DLC4TRICCT2	LED 4" Comm Downlight Diffuser CCT	120	65	12	1200	1300	100/108.3	80
<b>6" Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour</b>								
DLC6TRICCT2	LED 6" Comm Downlight Diffuser CCT	120	85	15	1450	1500	96.7/100	80
<b>8" Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour</b>								
DDLC8TRICCT2	LED 8" Comm Downlight Diffuser CCT	120	85	19	2000	2050	105.3/107.9	80
<b>10" Selectable Commercial Recessed Downlight – 100 Watt Replacement • 50,000 Hour</b>								
DLC10TRICCT2	LED 10" Comm Downlight Diffuser CCT	120	100	30	2850	2950	95/98.3	80
<b>12" Selectable Commercial Recessed Downlight – 125 Watt Replacement • 50,000 Hour</b>								
DLC12TRICCT2	LED 12" Comm Downlight Diffuser CCT	120	125	30	2850	2950	95/98.3	80

