

Reasons to choose the LED SelecT8 Color and Wattage Selectable Tubes from TCP

- Color selectable: 3000K, 3500K, 4100K, 5000K, 6500K
- Non-flickering
- Reduces inventory costs
- Over 50% energy savings compared to fluorescent alternatives
- Rated for open or enclosed fixtures and damp locations
- Long Life: 50,000 hours
- Instant on/off, no warm up time
- Use 1 SKU per job for multiple wattage and CCT requirements

Ideal Applications

- Offices
- Restaurants
- Retail Stores

- Schools
- Hospitals
- Grocery

Specifications

Base Type	G13
Construction	Type B: Double ended
System Wattage:	Type B: 12/15/18W
Safety	cETLus
	Damp/Dry Locations
	Suitable for enclosed luminaires
Rated Life	L70 50,000+ hours
Beam Angle	190°

Field Angle	300°
Ballast	T Type B: Bypass
Target Replacement Lamp	32W Flourescent
Operating Temperature	20°C to 45°C
Dimming	Non Dimmable
Glass	Frosted Glass
Power Factor	










LED SelecT8 Color and Wattage Selectable

LED SelecT8 Color and Wattage Selectable


Item#	Description	Voltage	LED Watts	Lumens	LPW	Color Temp	CRI
TYPE B DOUBLE ENDED							
L4T8SWB25CCTPET	LED 4' T8 SEL WATT T8 DE 5CCT	120-2 <i>77</i> V	12/15/18W	1800/2200/2600L	140LPVV	30/35/40/50/65K	80

Color Selectable Switch

L4T8SWB25CCTPET



Type B Wiring Diagrams

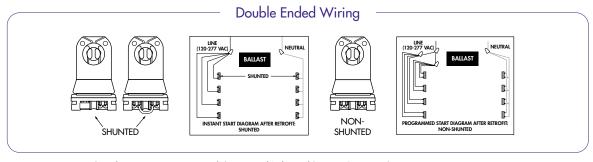

Complete instructions tcpi.com / Commercial Lighting / Business Resource Center







TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:	Catalog Number:
Date:	Туре:
Model:	Notes:
Project:	OTCP
Rep:	we know light.™