



LED Universal Combo Emergency Exit Sign

Product Specifications



The LED Universal Combo Emergency Exit Sign provides a single solution for exit identification and illumination. Available with vivid red or green lettering, the sign can be easily mounted from ceilings or walls to improve building safety. All models incorporate a battery backup, which keeps the sign illuminated for at least 90 minutes after power is lost.

Reasons to Choose LED Universal Combo Emergency Exit Sign from TCP


- Long-lasting, ultra-bright white LED lamp heads and red or green LED lettering
- EZ-snap mounting canopy included – Allows for top or end mount
- Battery backup features 9.6V long life, rechargeable NiCd battery
- UL listed for damp locations
- Transfer switch automatically connects to internal battery for minimum 90-minute emergency illumination
- Remote capable versions have remote capacity of 3.0W

Ideal Applications

- Retail
- Schools
- Hospitals
- Industrial

Construction

- White injection-molded, engineering grade thermoplastic housing
- Adjustable LED lamp heads provide optimal center-to-center spacing
- 5VA flame retardant and high-impact resistant
- EZ snap-out chevron directional indicators





LED Universal Combo Emergency Exit Sign

Specifications

Wattage..... 1.0W per lamp head
 Voltage..... Dual 120/277V
 Battery 9.6V NiCd
 Min Start Temp..... 32° F (0° C)
 Max Oper Temp 104° F (40° C)
 Warranty Five-year warranty on electronics and housing, battery prorated for five years

Electrical

- Dual 120/277 voltage
- 9.6V long life, maintenance-free, rechargeable NiCd battery
- Internal, solid-state transfer switch automatically connects to internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic, solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Remote capacity of up to 3.0W

Optics

- 1.0W (8 LEDs x 0.125W) per head
- Long-life, energy-efficient red or green LED illumination

Installation

- Universal knockout pattern on backplate for surface mount and conduit connections
- Suitable for wall or ceiling mount




Listings

UL Listed for Damp Locations, Certified to CEC under Title 20 Regulations, UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Warranty

Five-year warranty on electronics and housing, battery prorated for five years

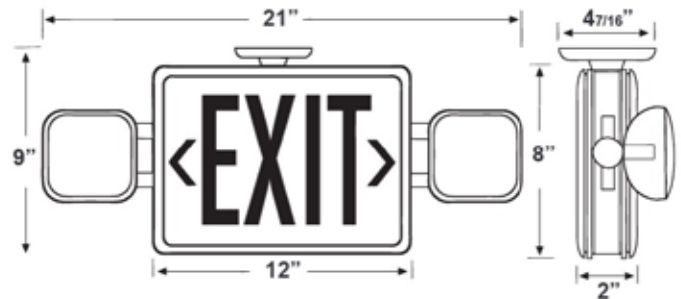

LED Universal Combo Emergency Exit Sign

ITEM #	DESCRIPTION	LIGHT COLOR	HOUSING COLOR
LED20723	LED UNIVERSAL COMBO EMERGENCY EXIT SIGN W/RED LETTERING	Red	White
LED20784	LED UNIVERSAL COMBO EMERGENCY EXIT SIGN W/RED LETTERING – REMOTE CAPABLE	Red	White
LED20785	LED UNIVERSAL COMBO EMERGENCY EXIT SIGN W/GREEN LETTERING – REMOTE CAPABLE	Green	White

