

LED Non-Dimmable PAR38

50,000 Hours average rated life, 120Volts

Applications:


Ideal for high output PAR38 flood and spot applications.

- + Track Lights
- + Recessed Downlights
- + Display Lights




Features and Benefits

- **Non-Dimming**
- **Energy Efficient:** Up to 80% less energy than halogen and CMH alternatives.
- **Exceeds all industry performance requirements.**
- **Long life:** Designed for 50,000 hours (lasts at least 15 times longer than alternative) 25,000 hour rated life for ENERGY STAR qualified lamps.
- **Very Durable:** Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design. Shatter resistant.
- **Very low heat generation** – excellent for sensitive display lighting.
- **Excellent Color consistency and high color rendering (CRI).**
- Available in black and white housings

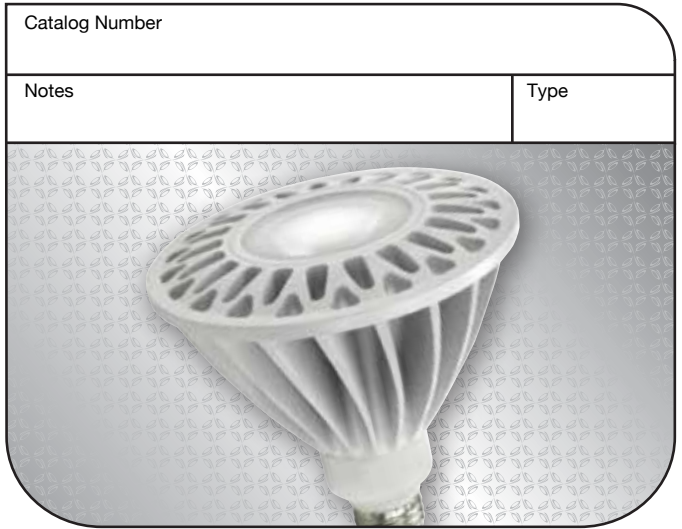

Specifications

Input Line Voltage:	120 VAC
Input Power	23W
Input Line Frequency	50/60HZ
Lamp Life (Rated)	50,000 hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C
CCT	27K, 30K, 41K
CRI	82

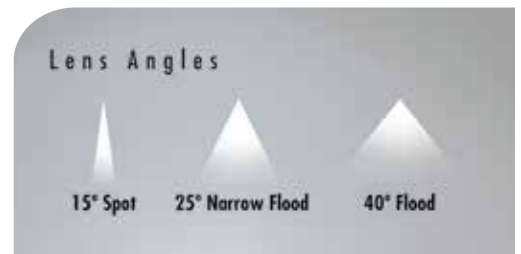

* For black housing option, add suffix "B" to the end of the item number

Warranties and Certifications:	Item #	Description	Voltage	Wattage	Incandescent Watt Equivalent	Lumens	LPW	CBCP	Beam Angle	CCT	CRI	
 5 YEAR WARRANTY	23W PAR38 2700K											
	LED23E26P3827KSPND	LED Non-Dimming 23W PAR38 Spot – 2700K	120	23	150W	1550	67.4	11517	15	2700K	82	
	LED23E26P3827KNFLND	LED Non-Dimming 23W PAR38 Narrow Flood – 2700K	120	23	150W	1550	67.4	7198	25	2700K	82	
	LED23E26P3827KFLND	LED Non-Dimming 23W PAR38 Flood – 2700K	120	23	150W	1550	67.4	2716	40	2700K	82	
	23W PAR38 3000K											
	LED23E26P3830KSPND	LED Non-Dimming 23W PAR38 Spot – 3000K	120	23	150W	1600	69.6	12518	15	3000K	82	
	LED23E26P3830KNFLND	LED Non-Dimming 23W PAR38 Narrow Flood – 3000K	120	23	150W	1600	69.6	7824	25	3000K	82	
	LED23E26P3830KFLND	LED Non-Dimming 23W PAR38 Flood – 3000K	120	23	150W	1600	69.6	2952	40	3000K	82	
	23W PAR38 4100K											
LED23E26P3841KSPND	LED Non-Dimming 23W PAR38 Spot – 4100K	120	23	150W	1700	73.9	13269	15	4100K	82		
LED23E26P3841KNFLND	LED Non-Dimming 23W PAR38 Narrow Flood – 4100K	120	23	150W	1700	73.9	8293	25	4100K	82		
LED23E26P3841KFLND	LED Non-Dimming 23W PAR38 Flood – 4100K	120	23	150W	1700	73.9	3130	40	4100K	82		

Specification Notes:

CBCP was estimated based on known photometry. Consult www.tcp.com for most current photometry and LM79 data.